

⚠ WARNING
DISCONNECT POWER BEFORE RE-LAMPING OR WIRING THE FIXTURE
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.

⚠ CAUTION

- TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES.
- INSTALLATION AND MAINTENANCE OF THIS UNIT REQUIRES AN ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.
- If an existing fixture is being replaced, remove it and note to which of the wires in the junction box the fixture was attached. DO NOT SEPARATE ANY OTHER WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING. In regular circumstances the BLACK wire will be the "Hot" lead and the WHITE wire will be the "Neutral" or "Common" lead. The GREEN or BARE COPPER wire is the "Ground". In older buildings it is always good practice to reconfirm the polarity of the wiring.

NOTICE

- The important safeguards and instructions outlined on this sheet cannot cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care factors that cannot be built into any product. Caution and care must be supplied by the person(s) installing, operating and caring of this lighting fixture.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box or a through wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The heavy duty strap and hardware supplied should be used. Directly mounting the fixture to the junction box may make it impossible to correctly align the fixture.
- This fixture is supplied with a 4-pcs. stem. There is one 6" section, two 12" section and one 18" section. This feature allows the fixture to be mounted with a stem up to 48" in length in 6" increments.
- This fixture is supplied with a swivel. By rotating the canopy the fixture may be mounted to angled ceiling.

NOTICE:
CALIFORNIA PROP 65: THIS LIGHTING FIXTURE CONTAINS CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, AND/OR OTHER REPRODUCTIVE HARM. WASH HANDS AFTER USE.

FIXTURE PREPARATION

1. Remove the fixture, glass parts and parts bag(s) from the carton.

NOTICE:

- Before discarding the carton, double check to make certain that all parts are found.

FIXTURE INSTALLATION

1. Attach the heavy duty strap unto the junction box (The green screw should face the floor). (See figure 01)
2. Determine the overall desired length of the fixture. Tape the end of the leads to a stiff wire (coat hanger) to aid in pulling them through the stems. Place the canopy onto the stem. Assemble the top stem section, fixture stem and swivel. Place the swivel block over the stem connector of the canopy and thread the hex nuts onto them.


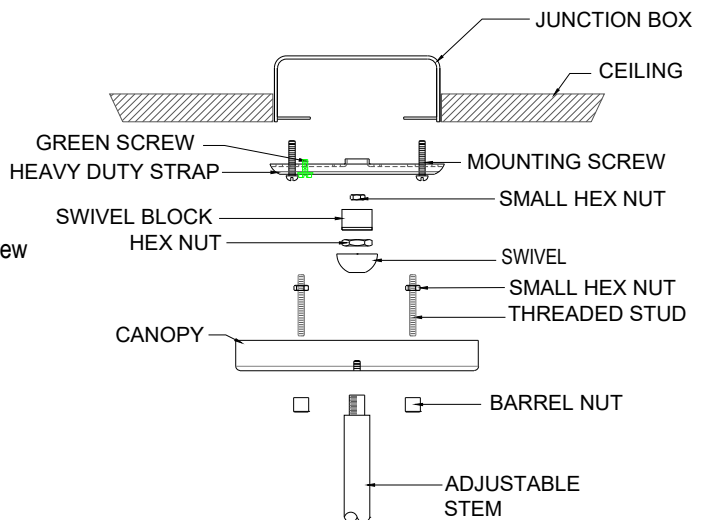


FIGURE-1

3. Thread the studs into the heavy duty strap at the spacing that matches the mounting holes in the canopy. Adjust the screw so they extend 3/16" beyond the canopy.
4. Cut off the excess fixture wire 6" beyond the swivel ball on the stem. Strip 1/2" insulation from the ends of the wire. Twist the wire strands together.
5. Fasten the ground wire to the green or bare copper wire in the junction box or the green screw on the heavy duty strap.

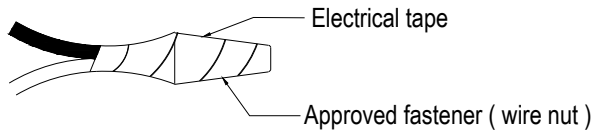

⚠ WARNING
Never fasten the ground wire to the black or "hot" wire! Failure to follow this instruction could result in serious injury or death!

6. Fasten the white fixture lead to the white wire in the Junction Box. Fasten the wires together with an approved fastener (wire nut). Starting about 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener.





⚠ WARNING
Make sure that there is no exposed wire or strands that could cause a dangerous short circuit!

7. Connect the black fixture lead to the black wire in the Junction Box. Fasten the joined wires as in step 6.
8. Pull up & attach the canopy to the heavy duty strap and secure it with barrel nuts. (See figure 02)
9. Place the bulb into the socket of the fixture.

NOTICE:
 This fixture is rated for 60w TYPE-A.


⚠ WARNING
DO NOT EXCEED RECOMMENDED WATTAGE!

10. Rotate the arms counter clockwise to their designated places. Start rotating from arm 1 up to arm 3. Rotate just enough to tighten the arms into place. (See Figure-04)
11. Restore power to the circuit breaker or fuse box.

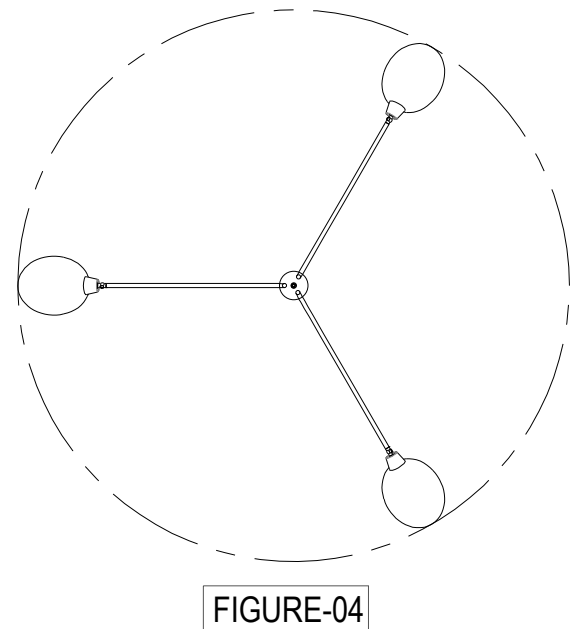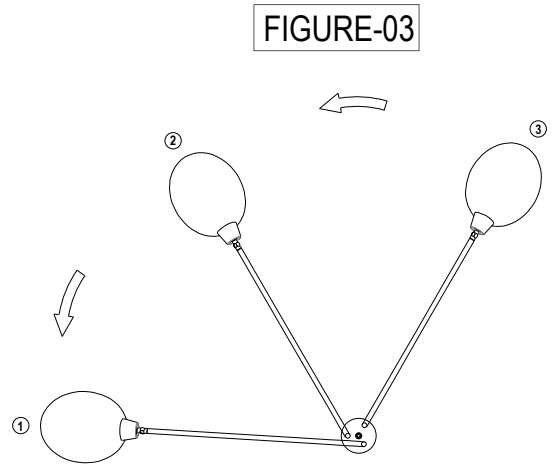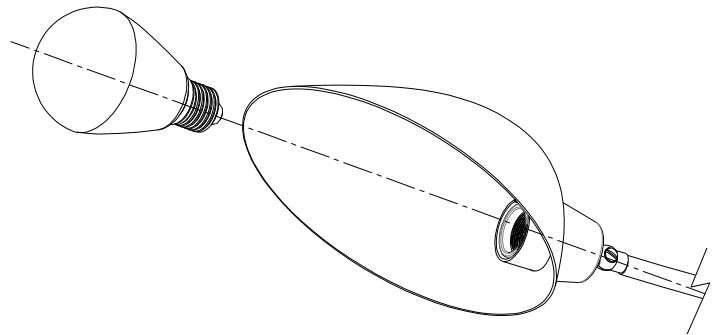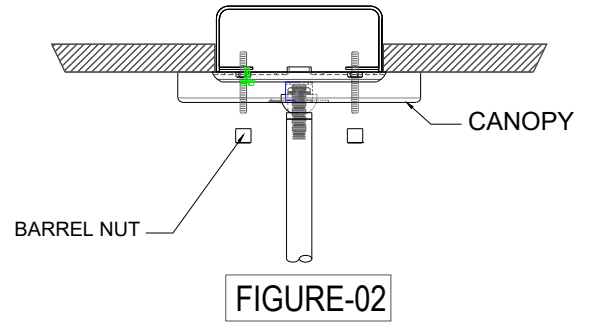

PARTS LIST F7813-SBK

ITEM NUMBER	PART NUMBER	DESCRIPTION
1	R-HI36-HRD	MOUNTING HARDWARE
2	R-HI36-BCN	CANOPY
3	R-HI36-STM	STEM-B
4	R-HI36-FRM	FRAME

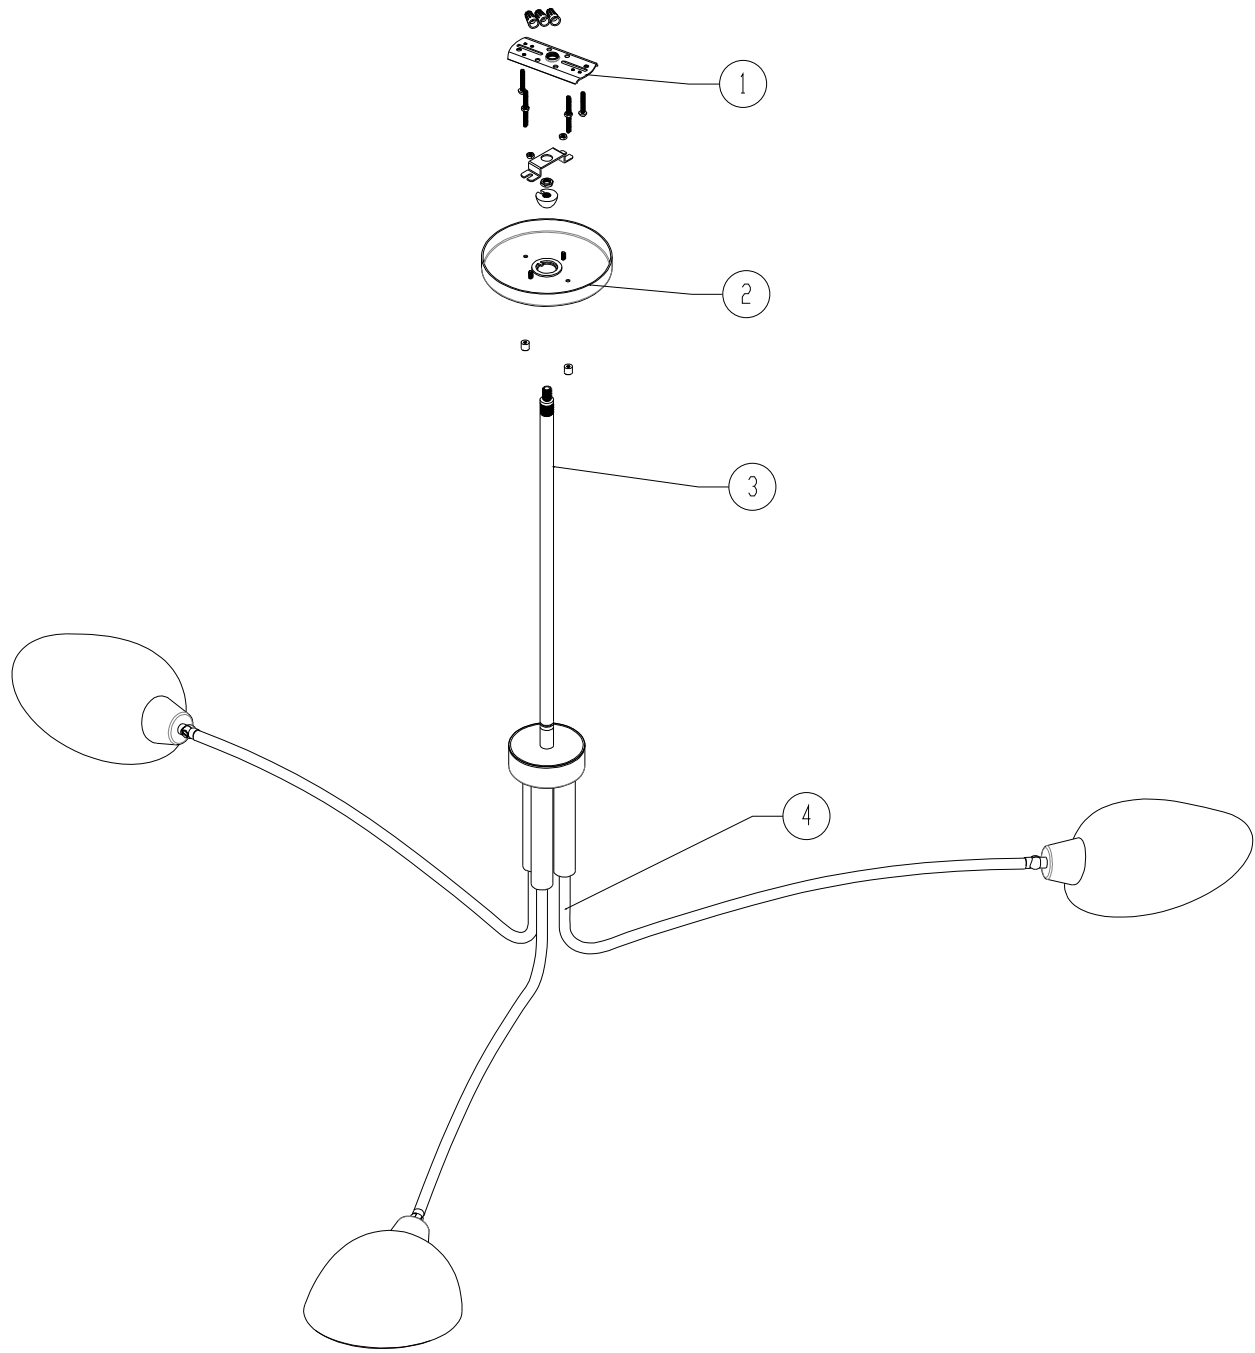

ATTENTION

**DÉBRANCHEZ L'ALIMENTATION AVANT DE REMPLIR OU DE CÂBLER LE LUMINAIRE
LIRE COMPLÈTEMENT TOUTES LES INSTRUCTIONS AVANT DE COMMENCER L'INSTALLATION.**

AVERTIR

- POUR ÉVITER LES RISQUES D'INCENDIE OU D'ÉLECTROCUTION, LE LUMINAIRE DOIT ÊTRE INSTALLÉ CONFORMÉMENT TOUTS LES CODES NATIONAUX ET LOCAUX DE L'ÉLECTRICITÉ ET DU BÂTIMENT APPLICABLES.
- L'INSTALLATION ET L'ENTRETIEN DE CET APPAREIL NÉCESSITENT UN ÉLECTRICIEN OU TECHNICIEN CERTIFIÉ FORMÉ EN USINE.
- Si un luminaire existant est remplacé, retirez-le et notez à quel fil de la boîte de jonction le luminaire était attaché. NE SÉPAREZ AUCUN AUTRE FIL PEUVENT ÊTRE DANS LA BOÎTE. N'ENDOMMAGEZ PAS L'ISOLATION DE L'ANCIEN CÂBLAGE. Dans des circonstances normales, le fil NOIR sera le fil "chaud" et le fil BLANC sera le fil "neutre" ou "commun". Le fil VERT ou CUIVRE NU est la "Masse". Dans les bâtiments plus anciens, il est toujours recommandé de reconfirmer la polarité du câblage.

AVIS

- Les garanties et instructions importantes décrites sur cette fiche ne peuvent pas couvrir toutes les conditions et situations possibles qui peut se produire. Il faut comprendre que le bon sens, la prudence et les soins sont des facteurs qui ne peuvent être intégrés à aucun produit. La prudence et les soins doivent être fournis par la ou les personnes installant, utilisant et prenant soin de cet appareil d'éclairage.
- Ce luminaire est conçu pour être monté sur une boîte ronde ou octogonale standard correctement installée ou une boîte de câblage traversante avec un cadre en plâtre. La boîte doit être solidement fixée à la structure du bâtiment. La sangle robuste et la quincaillerie fournies doivent être utilisées. le montage direct du luminaire sur la boîte de jonction peut rendre impossible l'alignement correct du luminaire.
- Ce luminaire est fourni avec 4 pcs. tige. Il y a une section de 6", deux sections de 12" et une section de 18". Cette caractéristique permet au luminaire d'être monté avec une tige jusqu'à 48" de longueur par incréments de 6".
- Ce luminaire est fourni avec un pivot. En faisant pivoter l'auvent, le luminaire peut être monté sur un plafond incliné.

AVIS:

CALIFORNIE PROP 65 : CET APPAREIL D'ÉCLAIRAGE CONTIENT DES PRODUITS CHIMIQUES CONNUS PAR L'ÉTAT DE CALIFORNIE POUR PROVOQUER LE CANCER, DES MALADIES CONGÉNITALES ET/OU D'AUTRES DOMMAGES À LA REPRODUCTION. LAVER LES MAINS APRÈS UTILISATION.

FIXTURE PREPARATION

1. Remove the fixture, glass parts and parts bag(s) from the carton.

AVIS:

- **Avant de jeter le carton, vérifiez assurez-vous que toutes les pièces sont trouvées.**

FIXTURE INSTALLATION

1. Attach the heavy duty strap unto the junction box (The green screw should face the floor). (See figure 01)
2. Determine the overall desired length of the fixture. Tape the end of the leads to a stiff wire (coat hanger) to aid in pulling them through the stems. Place the canopy onto the stem. Assemble the top stem section, fixture stem and swivel. Place the swivel block over the stem connector of the canopy and thread the hex nuts onto them.


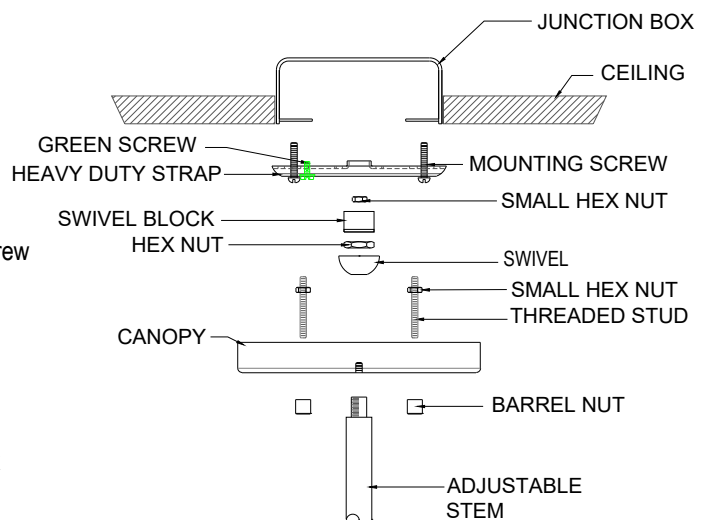


FIGURE-1

3. Thread the studs into the heavy duty strap at the spacing that matches the mounting holes in the canopy. Adjust the screw so they extend 3/16" beyond the canopy.

4. Cut off the excess fixture wire 6" beyond the swivel ball on the stem. Strip 1/2" insulation from the ends of the wire. Twist the wire strands together.

5. Fasten the ground wire to the green or bare copper wire in the junction box or the green screw on the heavy duty strap.

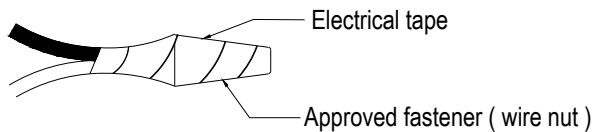

⚠ ATTENTION
Ne jamais fixer le fil de terre au noir ou "chaud" câble! Le non-respect de cette instruction peut entraîner blessures graves ou mortelles !

6. Fasten the white fixture lead to the white wire in the Junction Box. Fasten the wires together with an approved fastener (wire nut). Starting about 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener.

⚠ ATTENTION
Assurez-vous qu'il n'y a pas de fils ou de brins exposés cela pourrait provoquer un court-circuit dangereux !

7. Connect the black fixture lead to the black wire in the Junction Box. Fasten the joined wires as in step 6.

8. Pull up & attach the canopy to the heavy duty strap and secure it with barrel nuts. (See figure 02)

9. Place the bulb into the socket of the fixture.

AVIS:
 Ce luminaire est conçu pour 60W TYPE-A.

⚠ ATTENTION
NE PAS DÉPASSER LA PUISSANCE RECOMMANDÉE !

10. Rotate the arms counter clockwise to their designated places. Start rotating from arm 1 up to arm 3. Rotate just enough to tighten the arms into place. (See Figure-04)

11. Restore power to the circuit breaker or fuse box.

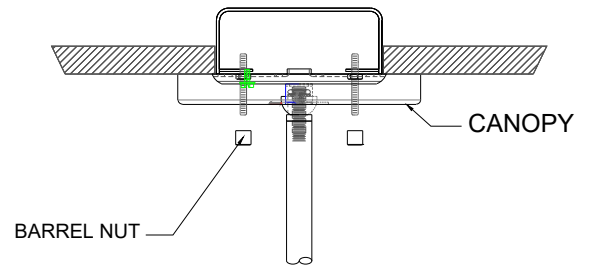


FIGURE-02

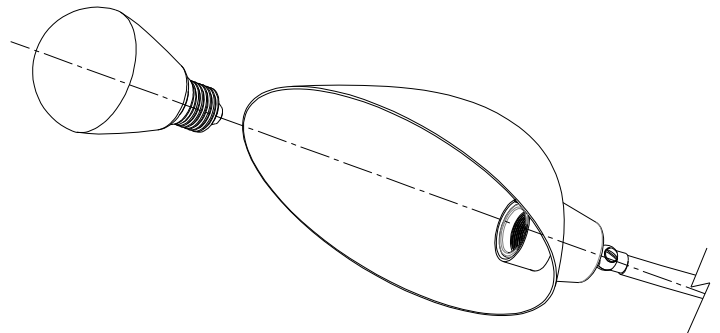


FIGURE-03


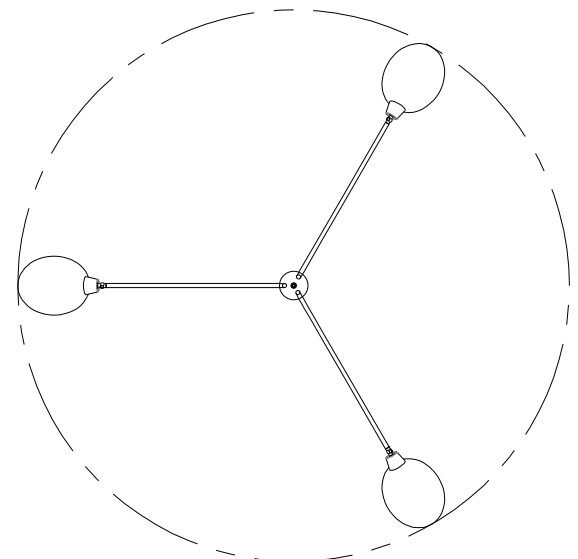


FIGURE-04

PARTS LIST F7813-SBK

ITEM NUMBER	PART NUMBER	DESCRIPTION
1	R-HI36-HRD	MOUNTING HARDWARE
2	R-HI36-BCN	CANOPY
3	R-HI36-STM	STEM-B
4	R-HI36-FRM	FRAME

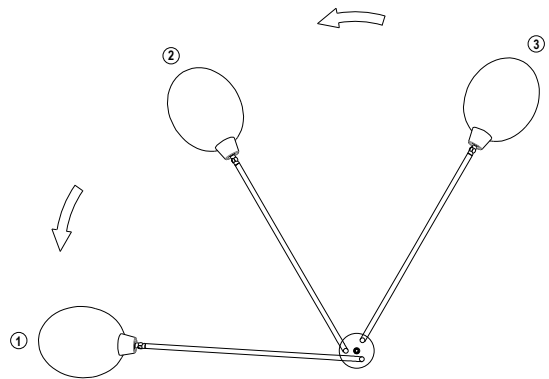