



# CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS

## ASSEMBLY INSTRUCTION MODEL #ROS-A1015-CH-CL-MWP

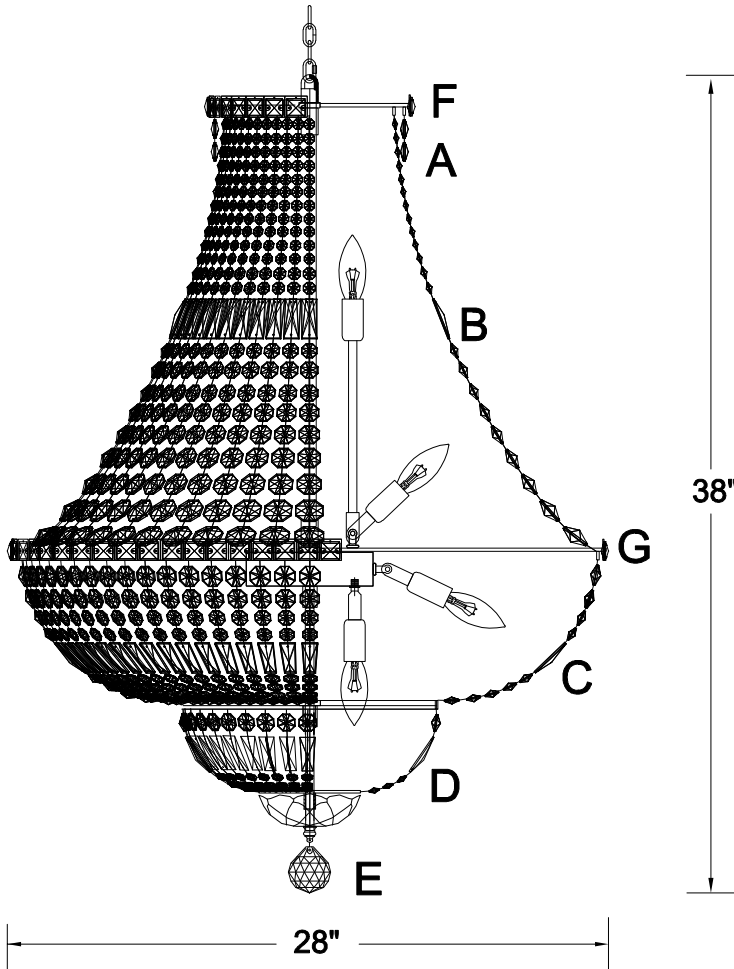

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 15-Candelabra Base Bulb  
40 Watts Recommended 60 Watts Max  
**USE LED BULBS FOR EXTENDED USE**  
The fixture is dry rated

### How to Install

1. Attach the top rod kit onto the coupler on the top of wiring box.
2. Attach the bottom rod kit onto the coupler on the bottom of wiring box.
3. Attach the bottom threaded pipe onto the coupler on the bottom metal rim. Do not install the glass dish before the crystal strands "D" are dressed.
4. After safely attaching fixture into outlet box, install bulbs (not included) and proceed to connecting the power.
5. Dress the crystal sets on the frame. Please hang the crystal strand "B" before crystal "A".
6. Place the glass dish and small metal dish over the threaded pipe, secure it with ball finial.
7. Hang the bottom crystal ball "E" on the finial.

### DETAILED ILLUSTRATION

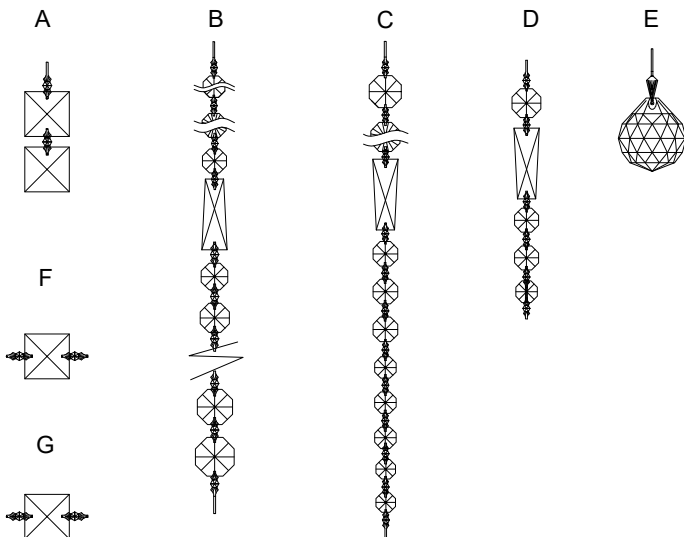

### Crystal Sets

- A. 27Sets. (2)22mm Square
- B. 54Sets. (6)12mm+(4)14mm+(1)16mm+(2)18mm  
+(1)50mm Baguette+(4)20mm+(1)22mm  
+(1)24mm+(2)26mm+(2)28mm
- C. 84Sets (2)22mm+(2)20mm+(1)50mm Baguette  
+(3)16mm+(2)14mm+(2)12mm
- D. 39Sets. (1)22mm+(1)50mm Baguette+(2)14mm+(1)12mm
- E. 1Piece AS8-50mm
- F. 27Sets. (1)22mm Square
- G. 84Sets. (1)22mm Square


**WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

# CRYSTORAMA



LIGHTING THE WAY FOR SIXTY YEARS

**PART NUMBER** MODEL #ROS-A1015-CH-CL-MWP

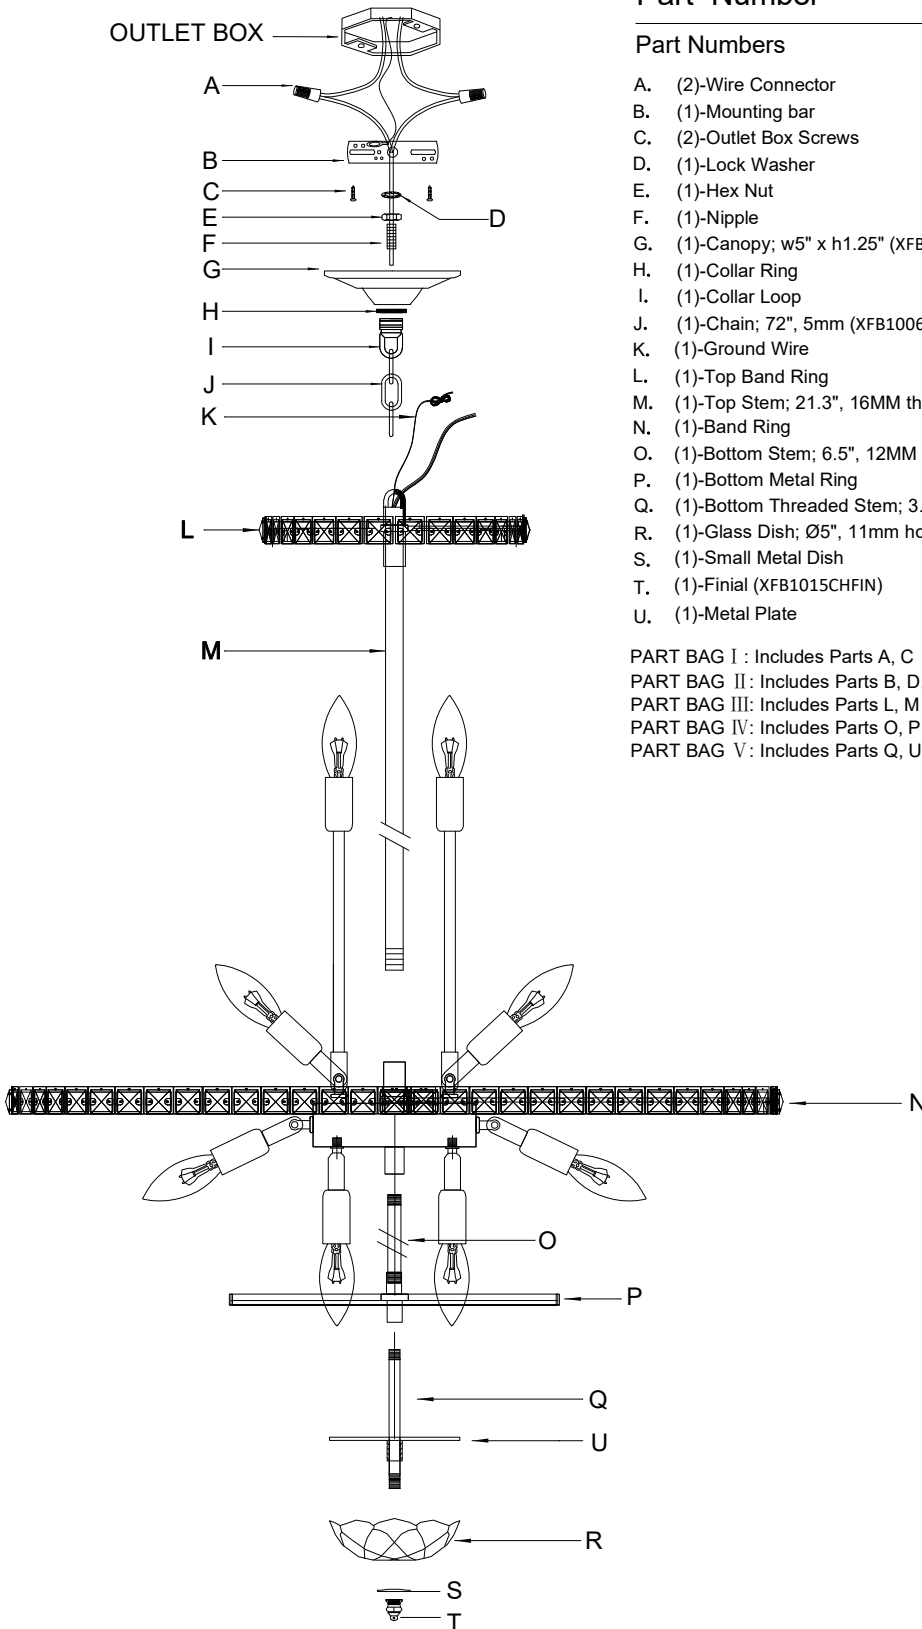

## Part Number

### Part Numbers

- A. (2)-Wire Connector
- B. (1)-Mounting bar
- C. (2)-Outlet Box Screws
- D. (1)-Lock Washer
- E. (1)-Hex Nut
- F. (1)-Nipple
- G. (1)-Canopy; w5" x h1.25" (XFB1006CHCAN5IN)
- H. (1)-Collar Ring
- I. (1)-Collar Loop
- J. (1)-Chain; 72", 5mm (XFB1006CHCHA5MM)
- K. (1)-Ground Wire
- L. (1)-Top Band Ring
- M. (1)-Top Stem; 21.3", 16MM thickness (XFB1015CHTOPSTEM21.3IN)
- N. (1)-Band Ring
- O. (1)-Bottom Stem; 6.5", 12MM thickness (XFB1015CHBOSTEM6.5IN)
- P. (1)-Bottom Metal Ring
- Q. (1)-Bottom Threaded Stem; 3.5", 10MM thickness (XFB1015CHBOSTEM3.5IN)
- R. (1)-Glass Dish; Ø5", 11mm hole (XFB1015DIBOB5IN)
- S. (1)-Small Metal Dish
- T. (1)-Finial (XFB1015CHFIN)
- U. (1)-Metal Plate

PART BAG I : Includes Parts A, C

PART BAG II : Includes Parts B, D, E, F, H, I

PART BAG III: Includes Parts L, M

PART BAG IV: Includes Parts O, P

PART BAG V: Includes Parts Q, U, S, T