

# LIVING DISTRICT

Collection: Baxter

Installation manual for:


LD2236BR L36"W7.9"H8"L3

## Installation instructions:

1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
3. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
4. Secure mounting bracket to the junction box.
5. Insert screws(P1,P3) in side of top unit the mounting bracket.
6. Fix the Mounting bracket(P2) to the Canopy and tighten by the Nuts(P6).
7. Fit lampshade(P13) with lampholder ring(P15).
8. Install the bulbs into the lamp fixture.(Bulb not included).

The end!

## PARTS LIST

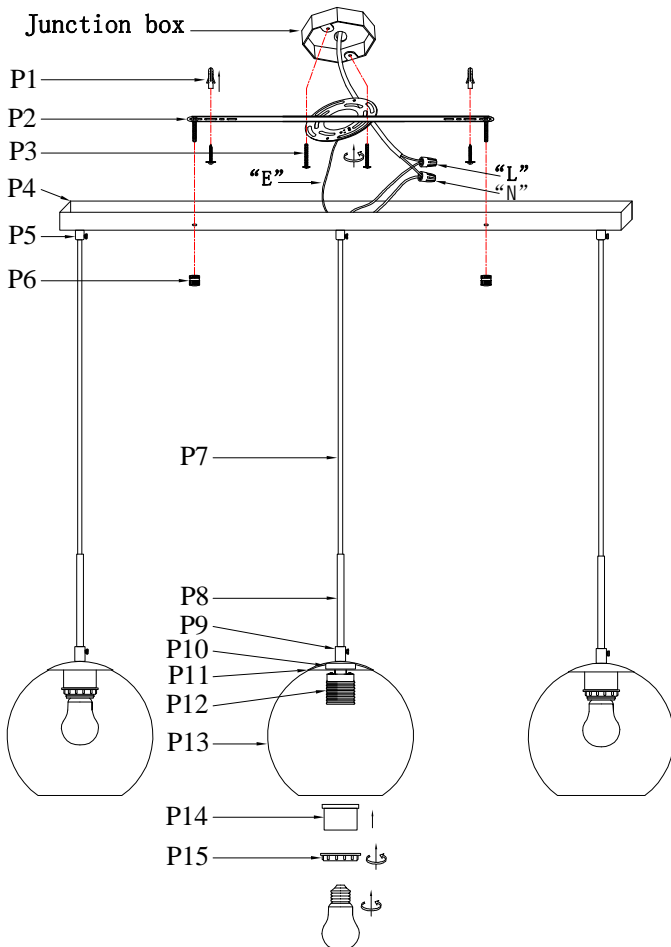

| part | picture | Description              | Qty | Check list |
|------|---------|--------------------------|-----|------------|
| P1   |         | Wall anchor with Screw   | 2   |            |
| P2   |         | L16.9" Mounting bracket  | 1   |            |
| P3   |         | 5/32 Screw               | 2   |            |
| P4   |         | L30.3" Metal Canopy      | 1   |            |
| P5   |         | Wire lock                | 3   |            |
| P6   |         | M5 Nut                   | 2   |            |
| P7   |         | Power Cord 79" 18# Black | 3   |            |
| P8   |         | L5.1" Metal Tube         | 3   |            |
| P9   |         | Wire lock                | 3   |            |
| P10  |         | ø1.6" Metal Cover        | 3   |            |
| P11  |         | ø3.5" Metal Cover        | 3   |            |
| P12  |         | E26 Lampholder           | 3   |            |
| P13  |         | ø7.9" Lampshade          | 3   |            |
| P14  |         | ø2" Metal Tube           | 3   |            |
| P15  |         | E26 Lampholder Ring      | 3   |            |

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire