CERES 59" ACRYLIC FREESTANDING TUB

Cat. No. ATDN59IG-XX





L:	59"
W:	30-¾"
H:	23-¾"

Water depth: 15-1/8" to overflow Water depth : 18-1/8" to top of tub Overflow hole diameter: 3-3/4" Center drain to back of rim: 15-1/2"


The following is recommended for this tub: •Freestanding filler: part #7932,7952, or 7918 (Does not need bath supplies)



For easier installation we recommend use of 5598-ITD Easy Install Rough In Kit

Gallon Capacity: Shipping Weight: Empty Weight: Filled Weight:

66 182 lbs. 82 lbs. 633 lbs.



Dimensions of fixture are nominal and specifications subject to change without notice.


Features:

- ► Acrylic construction for lighter weight
- ► Interior and exterior walls acrylic sheets
- Drain and overflow cover included
- ▶ Rim measurement:1-1/4"
- Overflow slot with integrated drain
- Drain included
- ► No faucet holes
- ► Angle slope of tub: 24°
- Option to add foam insulation between tub walls available
- Tubs are thorougly inspected before shipment
- ► New: Air jet sytem now available, more info on page 2

Finishes:

- BN Brushed Nickel
- CP Polished Chrome
- ORB Oil Rubbed Bronze
- PB Polished Brass
- PN Polished Nickel
- WT White
- MB Matte Black

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color

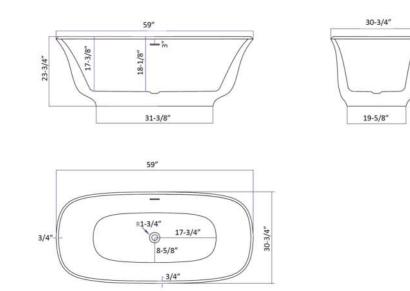

BATHTUB AIR JET KIT

Cat. No. AIR KIT 1. AIR KIT 2





E MAIN AIR INTAKE HOSE - High temperature and pressure resistant.

Air Kit is installed in tub before shipment

Features:

- ► Cord for remote receiver module is 68"
- ► Electrical cord for blower is 34"
- ► Blower 12-1/2" x 7"
- ► 750 Watt blower motor operates system
- ▶ 300 Watt air heater warms air
- ► System powered by 120V
- ▶ 16 brass air jets placed in bottom of tub
- ► Each air jet has 24 holes
- Air jet caps available in white (AIR KIT 1) or black (AIR KIT 2)
- Includes 1¼" x 3' main air hose plus 1¼" x 9' extension hose
- ► Automatic system purge after each use
- Automatic safety timer turns off system after 20 minutes
- Includes water tight remote control
- Compatible with most acrylic, copper and resin tubs with no feet
- ► Not available with cast iron tubs or tubs with feet








Remote



Blower







These diagrams are general representations. Jet placement may vary dependent on tub shape



INSIDE TUB VIEW - WILL VARY BY TUB DESIGN