

113-11 VERTIGO WALL SCONCE INSTALLATION INSTRUCTIONS

WARNING

**DISCONNECT POWER BEFORE RE-LAMPING OR WIRING THE FIXTURE
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.**

CAUTION

- TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES.
- INSTALLATION AND MAINTENANCE OF THIS UNIT REQUIRES AN ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.
- If an existing fixture is being replaced, remove it and note to which of the wires in the outlet box the fixture was attached. DO NOT SEPARATE ANY OTHER WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING. In regular circumstances the BROWN wire will be the "Hot" lead and the BLUE wire will be the "Neutral" or "Common" lead. The YELLOW/GREEN STRIPED wire is the "Ground". In older buildings it is always good practice to reconfirm the polarity of the wiring.

NOTICE

- The important safeguards and instructions outlined on this sheet cannot cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care factors that cannot be built into any product. Caution and care must be supplied by the person(s) installing, operating and caring of this lighting fixture.
- This fixture is design to be mounted on a correctly installed standard round or octagon box or a through wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used. Directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.


FIXTURE PREPARATION

1. Remove the fixture, parts and parts bag(s) from the carton.

NOTICE:
Before discarding the carton,
double check to make certain that all parts are found .

FIXTURE INSTLLATION

1. Attach the crossbar to the outlet box.
2. Start the stud into the crossbar at the proper spacing.
3. Fasten the ground wire to the yellow/green striped wire in the outlet box.

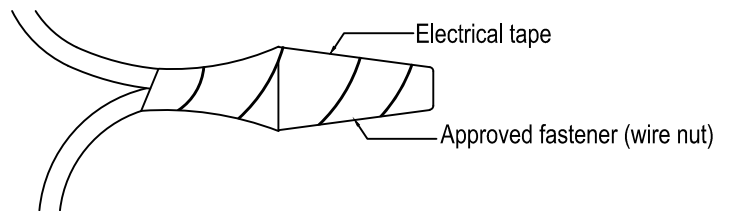

WARNING

Never fasten the ground wire to the brown or "hot" wire! Failure to follow this instruction could result in serious injury or death!

4. Fasten the blue fixture lead to the blue wire in the outlet box. Fasten the wires together with an approved connector.

Figure-1



WARNING

Make sure that there is no exposed wire or strands that could cause dangerous circuit failure!

5. Connect the brown fixture lead to the brown wire in the outlet box.
Fasten the wires together with an approved wire connector.
6. Using the end balls, fasten the fixture to the outlet box.
7. Install the lamps (light bulbs).
NOTE: This fixture is rated for 60 watt type A lamp.



WARNING

DO NOT EXCEED RECOMMENDED WATTAGE!

8. Reinstall the band trim.
9. Place the diffuser into the fixture.
10. Restore power to circuit at breaker or fuse box.

