

⚠ WARNING
DISCONNECT POWER BEFORE RE-LAMPING OR WIRING THE FIXTURE
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.

⚠ CAUTION

- TO AVOID THE RISK OF FIRE OR SHOCK, FIXTURE MUST BE INSTALLED IN COMPLIANCE WITH ALL APPLICABLE NATIONAL AND LOCAL ELECTRICAL/BUILDING CODES.
- INSTALLATION AND MAINTENANCE OF THIS UNIT REQUIRES AN ELECTRICIAN OR CERTIFIED FACTORY TRAINED TECHNICIAN.
- If an existing fixture is being replaced, remove it and note to which of the wires in the outlet box the fixture was attached. DO NOT SEPARATE ANY OTHER WIRES THAT MAY BE IN THE BOX. DO NOT DAMAGE THE INSULATION OF OLDER WIRING. In regular circumstances the BLACK wire will be the "Hot" lead and the WHITE wire will be the "Neutral" or "Common" lead A GREEN or BARE COPPER wire is the "Ground". In older buildings it is always good practice to reconfirm the polarity of the wiring.

NOTICE

- The important safeguards and instructions outlined on this sheet cannot cover all possible conditions and situations that may occur. it must be understood that common sense, caution and care factors that cannot be built into any product. Caution and care must be supplied by the person(s) installing, operating and caring of this lighting fixture.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box or a through wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The mounting ring and hardware supplied should be used. directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.

NOTICE: CALIFORNIA PROP 65: THIS LIGHTING FIXTURE CONTAINS CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, AND/OR OTHER REPRODUCTIVE HARM. WASH HADNS AFTER USE.

FIXTURE PREPARATION


1. Remove the fixture, glass/metal parts and parts bag(s) from the carton.

NOTICE:
Before discarding the carton, double check to make certain that all parts are found.

FIXTURE INSTALLATION

1. Fasten the Red wire of the Driver to the Red wire of the fixture, Then Fasten also the Blue wire of the Driver to Black wire of the fixture(FIGURE1)
2. Connect The black wire of the driver and black wire of the bulb to Black wire of junction box.(FIGURE1)
3. Connect White wire of the driver and Red wire of the bulb to the white wire of the junction box. (FIGURE1)

Note : fasten the wires together with an approved fastener (wire nut). Starting about 1" below the fastener, tightly wrap the connection with electrical tape so that the connections seals the end of the fastener.

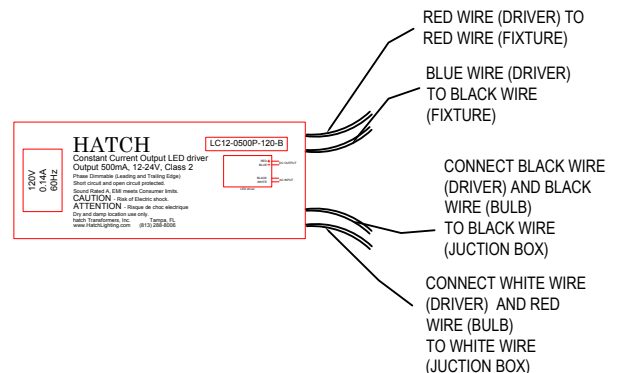

SEE ALSO DRIVER COLOR CODING
**LED LAMP TO LED DRIVER
 WIRE CONNECTION DETAILS**

FIGURE-1

WARNING
 Never fasten the ground wire to the black or "hot" wire! Failure to follow this instruction could result in serious injury or death!

WARNING
 Make sure that there is no exposed wire or strands that could cause a dangerous short circuit!

4. Using the two (2) flat screws, fasten the fixture to the outlet box through the side holes.
5. Attach the center stem and place the glass column together with the stainless trim, place the end cap and screw the finial to hold the glass column in place (See figure-2).
6. Place the fabric shade, Use the flat screws to hold the shade in place (See figure-2).
7. Restore power to circuit at breaker or fuse box.

NOTICE:
 Must use a incandescent dimmer with LED's on this fixture.
 *Lutron Maestro dimmer not compatible.

WARNING
 DO NOT EXCEED RECOMMENDED WATTAGE!

8. Install the lamps (lighting bulbs). NOTE: This fixture is rated for 60 watts candelabra base type B, BA, C or CA lamp.

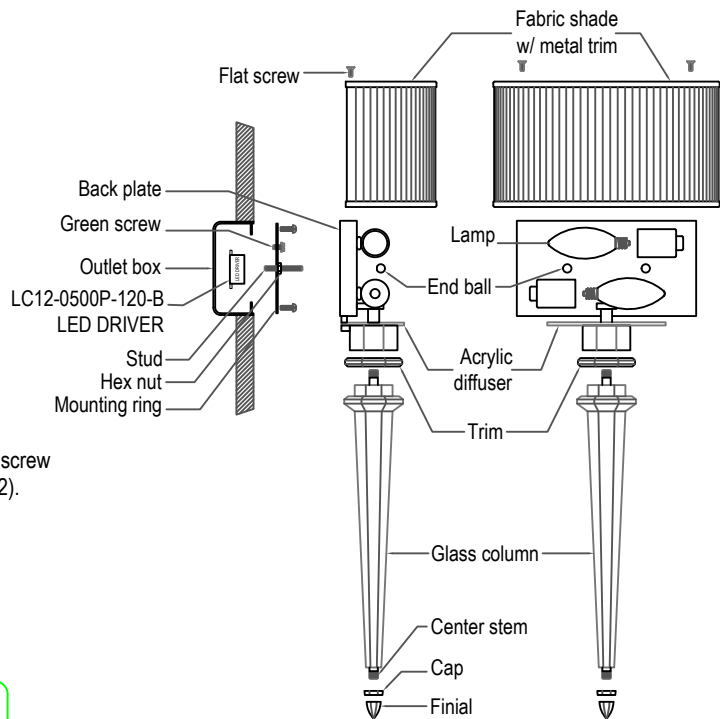


FIGURE-2

