


**NL-4857**

**4" Square Trim with Regressed Reflector**

Source: 75W max.

**MR16**

**PRODUCT IMAGES AND DIMENSIONS**

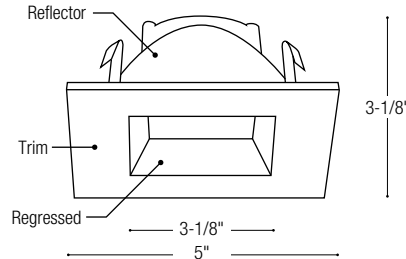

**Compatible Housings**

Item Number / Description / Max. Wattage	
<b>LINE VOLTAGE</b>	
<b>NLSL-401AT/10</b> = Non-IC Air-Tight New Construction / 50W	
<b>NSLIC-401AT/10</b> = ICAT New Construction / 50W	
<b>NSLR-404AT/10</b> = Non-IC Air-Tight Remodel / 50W	
<b>LOW VOLTAGE</b>	
<b>NL-401QAT/20</b> = Non-IC AT New Construction / 120V Magnetic / 20W	
<b>NL-401QAT/37</b> = Non-IC AT New Construction / 120V Magnetic / 37W	
<b>NL-401QAT</b> = Non-IC AT New Construction / 120V Magnetic / 50W	
<b>NL-401/50/277AT</b> = Non-IC AT New Const. / 277V Magnetic / 50W	
<b>NL-401AT/1EL</b> = Non-IC AT New Construction / 120V Electronic / 50W	
<b>NL-401AT/2EL</b> = Non-IC AT New Construction / 277V Electronic / 50W	
<b>NL-401/75</b> = Non-IC New Const. / 120V Magnetic / 75W	
<b>NL-401/75/277</b> = Non-IC New Const. / 277V Magnetic / 75W	
<b>NL-401/75/1EL</b> = Non-IC New Const. / 120V Electronic / 75W	
<b>NL-401/75/2EL</b> = Non-IC New Const. / 277V Electronic / 75W	
<b>NLIC-401QSAT/20</b> = ICAT New Construction / 120V Magnetic / 20W	
<b>NLIC-401QSAT/37</b> = ICAT New Construction / 120V Magnetic / 37W	
<b>NLIC-401QSAT</b> = ICAT New Construction / 120V Magnetic / 50W	
<b>NLIC-401AT/277V</b> = ICAT New Construction / 277V Magnetic / 50W	
<b>NLIC-401AT/1EL</b> = ICAT New Construction / 120V Electronic / 50W	
<b>NLIC-401AT/2EL</b> = ICAT New Construction / 120V Electronic / 50W	
<b>NLR-404QAT/20</b> = Non-IC AT Remodel / 120V Magnetic / 20W	
<b>NLR-404QAT/37</b> = Non-IC AT Remodel / 120V Magnetic / 37W	
<b>NLR-404QAT</b> = Non-IC AT Remodel / 120V Magnetic / 50W	
<b>NLR-404/50/277</b> = Non-IC AT Remodel / 277V Magnetic / 50W	
<b>NLR-404AT/1EL</b> = Non-IC AT Remodel / 120V Electronic / 50W	
<b>NLR-404AT/2EL</b> = Non-IC AT Remodel / 277V Electronic / 50W	
<b>NLR-404/75</b> = Non-IC Remodel / 120V Magnetic / 75W	
<b>NLR-404/75/277</b> = Non-IC Remodel / 277V Magnetic / 75W	
<b>NLR-404/75/1EL</b> = Non-IC Remodel / 120V Electronic / 75W	
<b>NLR-404/75/2EL</b> = Non-IC Remodel / 277V Electronic / 75W	
<b>NLR-405AT/20</b> = Non-IC AT Remodel / No Transformer / 20W	
<b>NLR-405AT/37</b> = Non-IC AT Remodel / No Transformer / 37W	
<b>NLR-405AT</b> = Non-IC AT Remodel / No Transformer / 50W	
<b>NLIC-402QSAT/20</b> = ICAT Shallow New Const. / 120V Magnetic / 20W	
<b>NLIC-402QSAT/37</b> = ICAT Shallow New Const. / 120V Magnetic / 37W	
<b>NLIC-402QSAT</b> = ICAT Shallow New Const. / 120V Magnetic / 50W	
<b>NLIC-402AT/1EL</b> = ICAT Shallow New Const. / 120V Electronic / 50W	
<b>NL-402S/20</b> = Non-IC Shallow New Const. / 120V Magnetic / 20W	
<b>NL-402S/37</b> = Non-IC Shallow New Const. / 120V Magnetic / 37W	
<b>NL-402S</b> = Non-IC Shallow New Const. / 120V Magnetic / 50W	
<b>NL-402S/1EL</b> = Non-IC Shallow New Const. / 120V Electronic / 50W	
<b>NLR-403S/20</b> = Non-IC Shallow Remodel / 120V Magnetic / 20W	
<b>NLR-403S/37</b> = Non-IC Shallow Remodel / 120V Magnetic / 37W	
<b>NLR-403S</b> = Non-IC Shallow Remodel / 120V Magnetic / 50W	
<b>NLR-403S/1EL</b> = Non-IC Shallow Remodel / 120V Electronic / 50W	

**CONSTRUCTION**

**Trim:** 4" die-cast aluminum flange provides sharp clean corners. Non-reflective painted finishes and square aperture. Gimbal ring allows lamp to be mounted on top of the reflector and adjustable up to 35°.

**Mounting:** Trim includes three trim clips that securely mounts inside the housing.

**COMPATIBLE LAMP / HOUSINGS**

**Line Voltage:**

50W MR16 GU10 max. (NSL-401AT/10; NSLIC-401AT/10; NSLR-404AT/10)

**Low Voltage:**

3-50W MR16 LED (NL-401AT/1EL; NLIC-401AT/1EL; NLR-404AT/1EL; NLIC-402AT/1EL; NL-402S/1EL; NL-403S/1EL)  
 20W MR16 max. (NL-401QAT/20; NLIC-401QSAT/20; NLR-404QAT/20; NLR-405AT/20; NLIC-402QSAT/20; NL-402S/20; NLR-403S/20)  
 37W MR16 max. (NL-401QAT/37; NLIC-401QSAT/37; NLR-404QAT/37; NLR-405AT/37; NLIC-402QSAT/37; NL-402S/37; NLR-403S/37)  
 50W MR16 max. (NL-401QAT; NL-401/50/277AT; NL-401AT/1EL; NL-401AT/2EL; NLIC-401QSAT; NLIC-401AT/277V; NLIC-401AT/1EL; NLIC-401AT/2EL; NLR-404QAT; NLR-404/50/277; NLR-404AT/1EL; NLR-404AT/2EL; NLR-405AT; NLIC-402QSAT; NLIC-402AT/1EL; NL-402S; NL-402S/1EL; NLR-403S; NLR-403S/1EL)  
 75W MR16 max. (NL-401/75; NL-401/75/277; NL-401/75/1EL; NL-401/75/2EL; NLR-404/75; NLR-404/75/277; NLR-404/75/1EL; NLR-404/75/2EL)

**LISTING**

cULus Listed for damp locations when used with compatible housing



**4" Square Trim with Regressed Reflector - Housing Required**

Series	Finish
<b>NL-4857</b> = 4" Square Trim with Regressed Reflector	<b>BB</b> = Black Reflector / Black Regressed / Black Trim
	<b>BBW</b> = Black Reflector / Black Regressed / White Trim
	<b>BWW</b> = Black Reflector / White Regressed / White Trim
	<b>BZBZ</b> = Bronze Reflector / Bronze Regressed / Bronze Trim
	<b>HZHZW</b> = Haze Reflector / Haze Regressed / Haze Trim
	<b>NN</b> = Natural Metal Reflector / Natural Metal Regressed / Natural Metal Trim
	<b>WBB</b> = White Reflector / Black Regressed / Black Trim
	<b>WW</b> = White Reflector / White Regressed / White Trim

Example: **NL-4857BWW** = 4" Square White Trim with Black Reflector and White Regressed