

LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL#ROY-800-GA



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 3- Medium Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE THE FIXTURE IS DRY RATED

How to install

- Install the mounting Strap to the outlet box using two outlet box screws.
- 2. Install the bulb(not included) into the socket.
- 3. Raise the frame over the outlet box and Hook the safety cable onto the mounting strap.
- 4. After the wire connection is completed, secure the frame onto the mounting strap with two ball nuts.
- 5. Screw the threaded nipple onto the coupler on the ceiling pan and secure with hex nut.
- Place the metal washer, plastic washer and glass diffuser, plastic washer,metal washer, in that order, over the threaded Nipple and secure with hex nut.
- 7. Place the bottom cap over the threaded nipple and secure with the finial.

SIDE VIEW

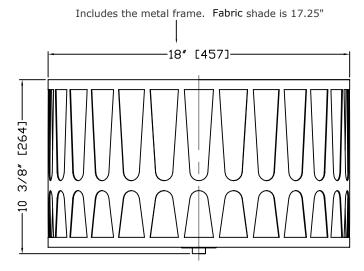



LIGHTING THE WAY FOR SIXTY YEARS

