

Assembly Instruction Sheet #S-1212P14 For Style 1212P14

Total Requirement: Philips screwdriver, Philips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (1) SUGGESTED LED G9 BULB MAX 6W (Not Included).
Estimated Assembly Time: 15-30 minutes.
Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams before to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions
 Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents



Glass shade x1 Ceiling Canopy x1

Fixture Body x1 Middle Rod

B1 4" x 2 pcs
 B2 6" x 1 pcs
 B3 12" x 5 pcs

Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Wire nut	2 pcs
CC	Screw	2 pcs

BB  CC 

STEP 1 - Release Crowbar from Ceiling Canopy.


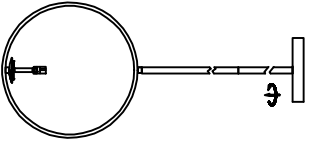
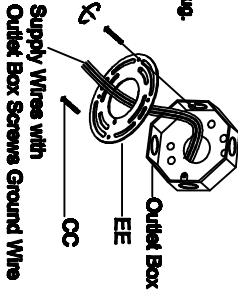
Figure 1 

Figure 2 


STEP 2-Install Rods to Fixture Body.

STEP 3 - Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground (EE) to Screw facing you. Secure it with Outlet Box Screws (CC). Tighten until snug.

Figure 3 


STEP 5 - Install Ceiling Canopy to Ceiling

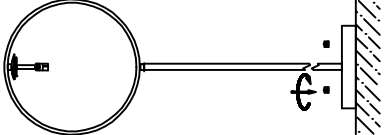Figure 5 

STEP 4 - Wire Connections

A. Use standard wire connections to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

White wire from outlet box White wire from fixture
 Black wire from outlet box (or Red) Black wire from fixture
 Bare, or Green Ground wire from outlet box Ground wire from fixture
 Bare, or Green Ground wire from outlet box Ground wire from fixture

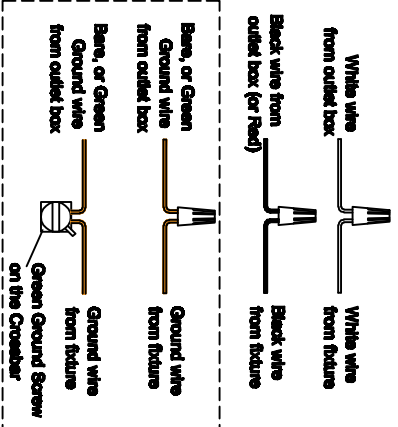Figure 4 

STEP 6 - Install bulb and Glass Shade.

Figure 6 