

Assembly Instruction Sheet #IS-5025P34

For Style 5025P34

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (8) E12 Candelabra Base Bulbs 60W Maximum(Not Include)+120V 1W LED DIMMABLE


Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents



A Middle column X 1PCS



B Arm X 8PCS



C Ceiling Canopy X 1PCS



D Part x1




E Crossbar x1



F bobeches x8



G Socket sleeve x8



H Bend the pipe X 16PCS



1 Crystal X 8PCS



2 Crystal X 36PCS



3 Crystal X 8PCS



4 Crystal X 16PCS



5 Crystal X 1PCS

Hardware Contents

PART	DESCRIPTION	QUANTITY
BB	Wire nut	2pcs
EE	Screw	2pcs

BB



EE



STEP 1 -Install Arm.

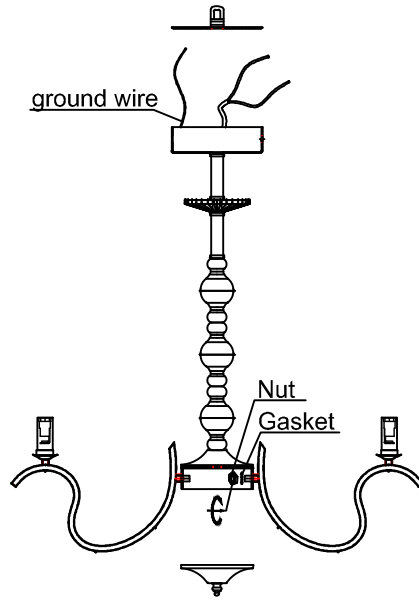


Figure 1

STEP 2-Wire Connections.

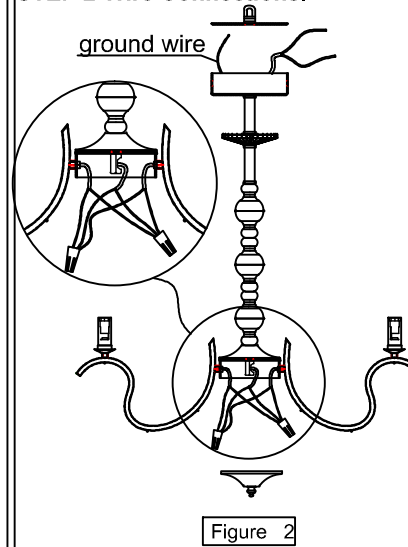


Figure 2

3.Install Metal cover.

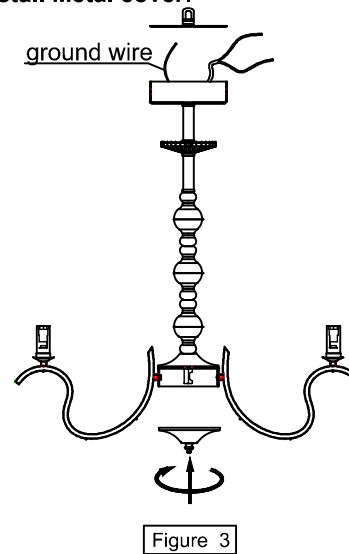


Figure 3

4.loosen Metal cover.




Figure 4

5.loosen Metal cover.

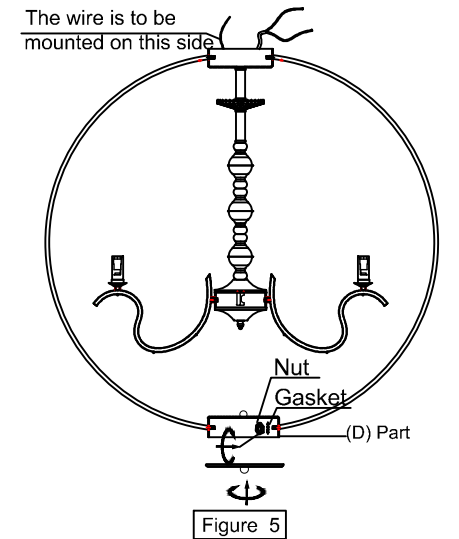


Figure 5

STEP 6-Wire Connections.

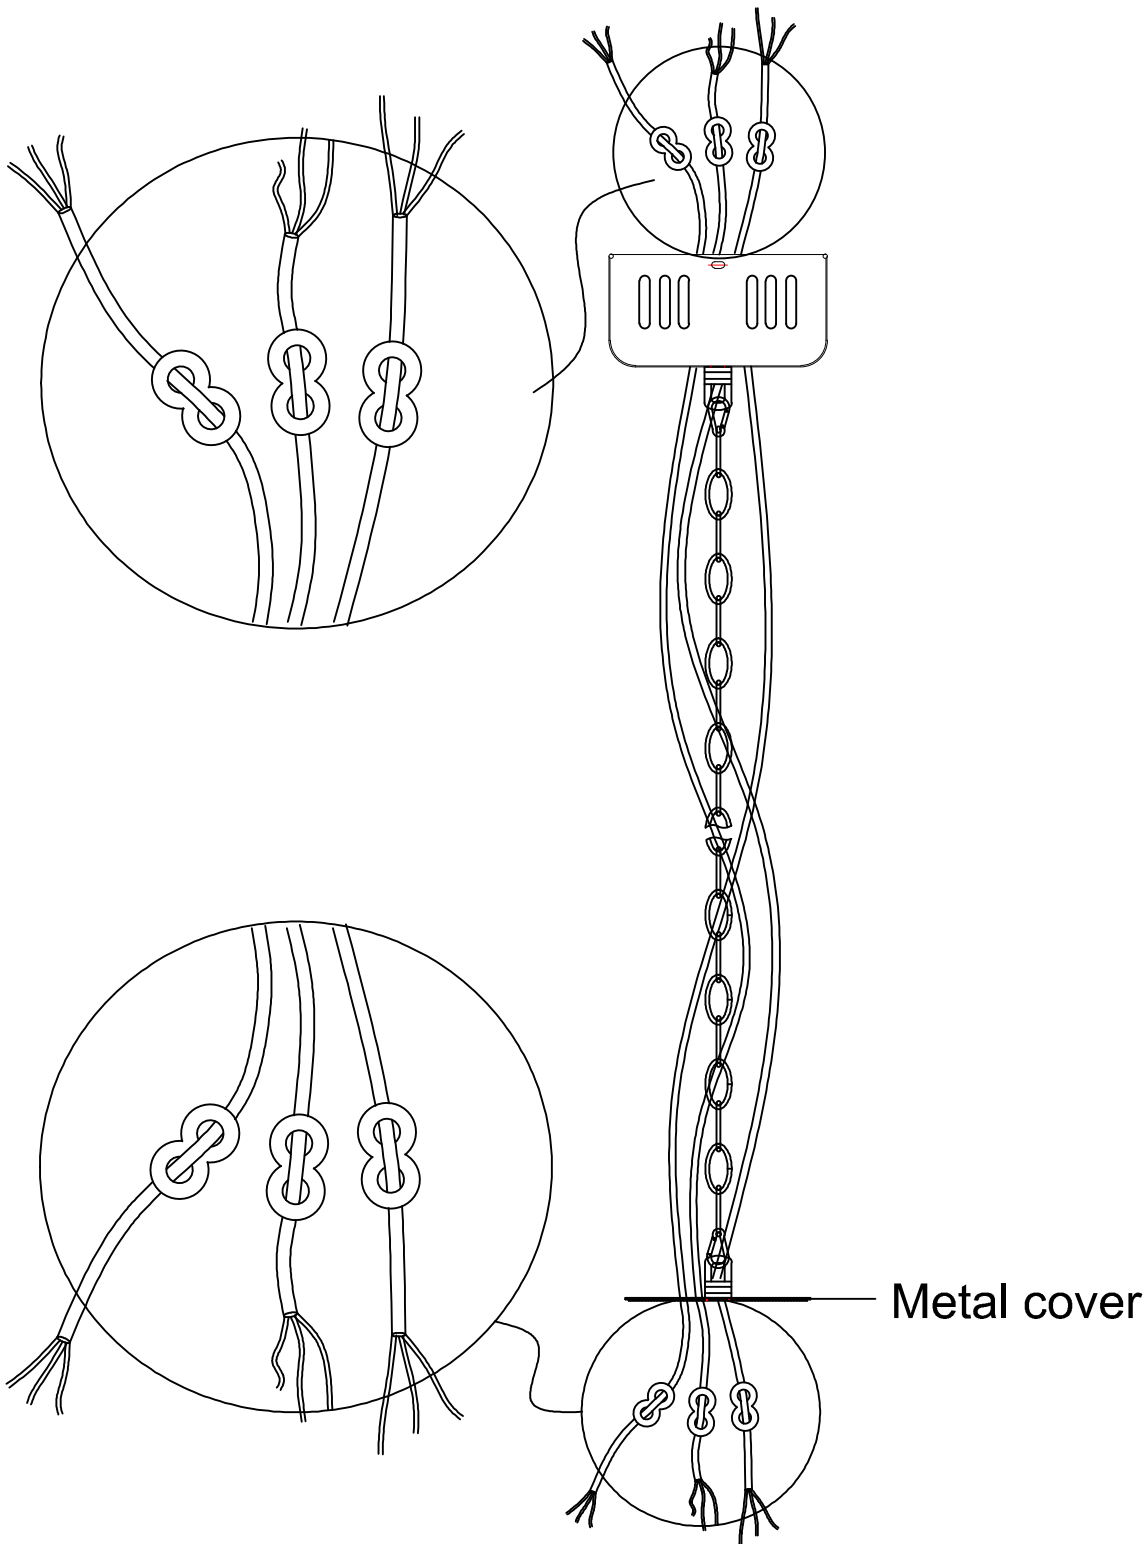


Figure 6

STEP 7-Wire Connections.


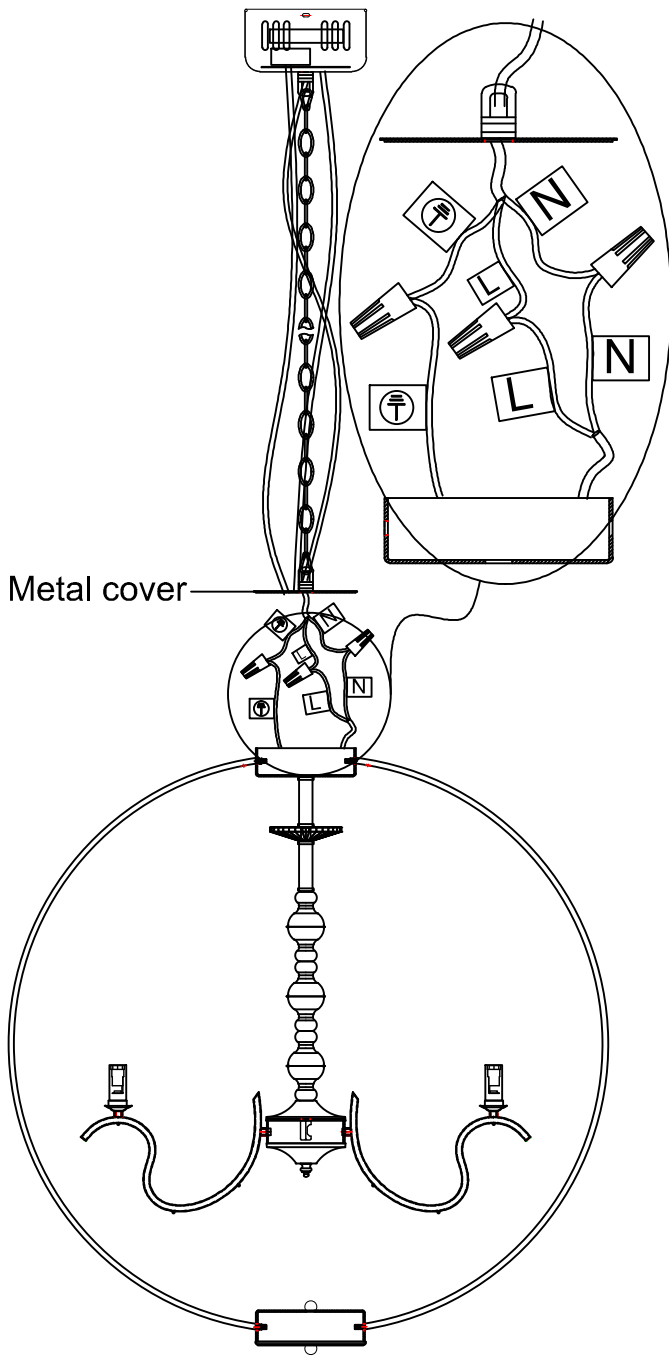


Figure 7

STEP 8 - Wire Connections

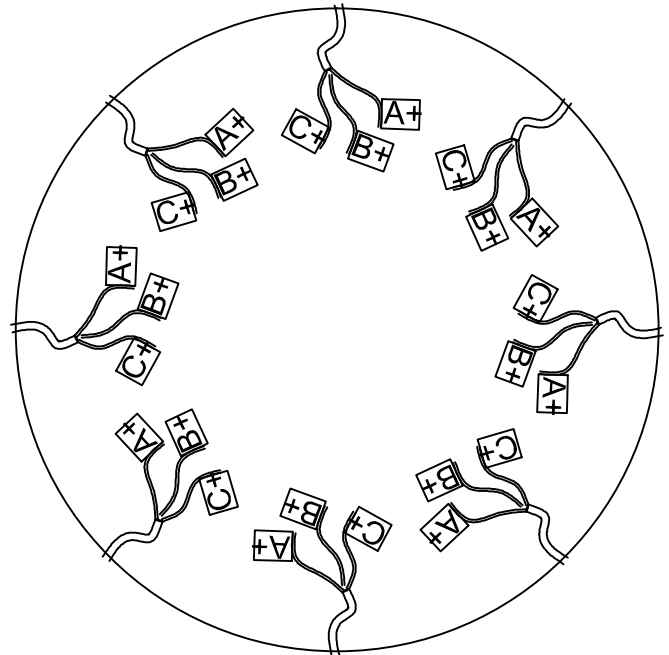

vertical view

Figure 8

STEP 9 - Wire Connections

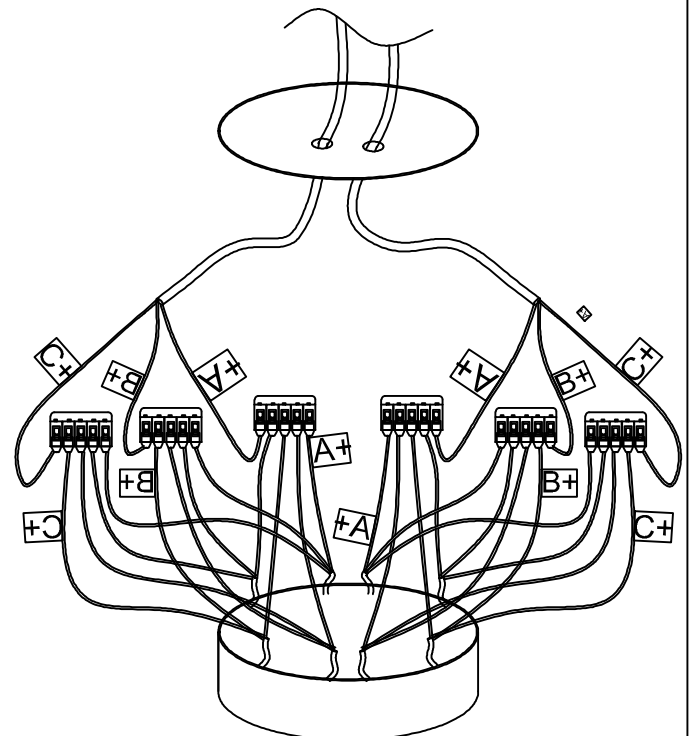


Figure 9

STEP 10-Wire Connections.

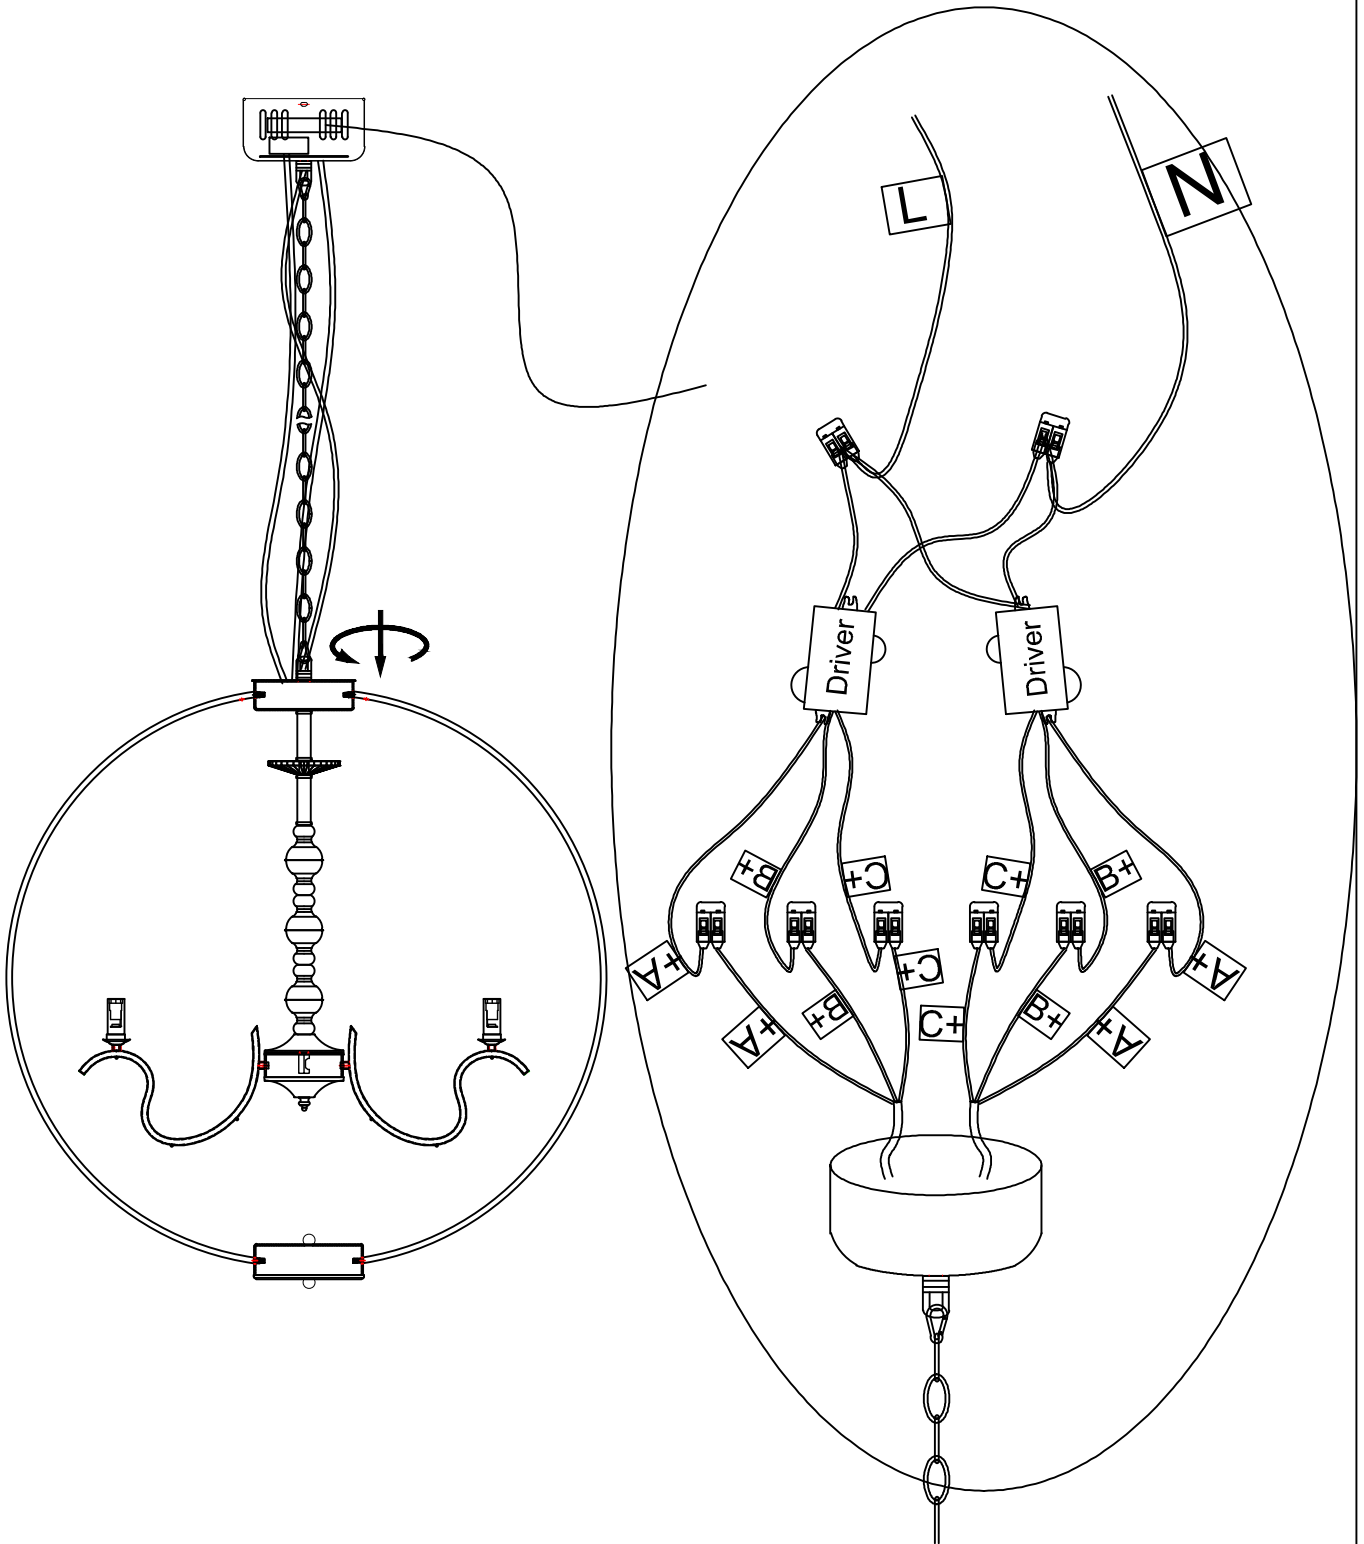


Figure10

STEP 11-Wire Connections.

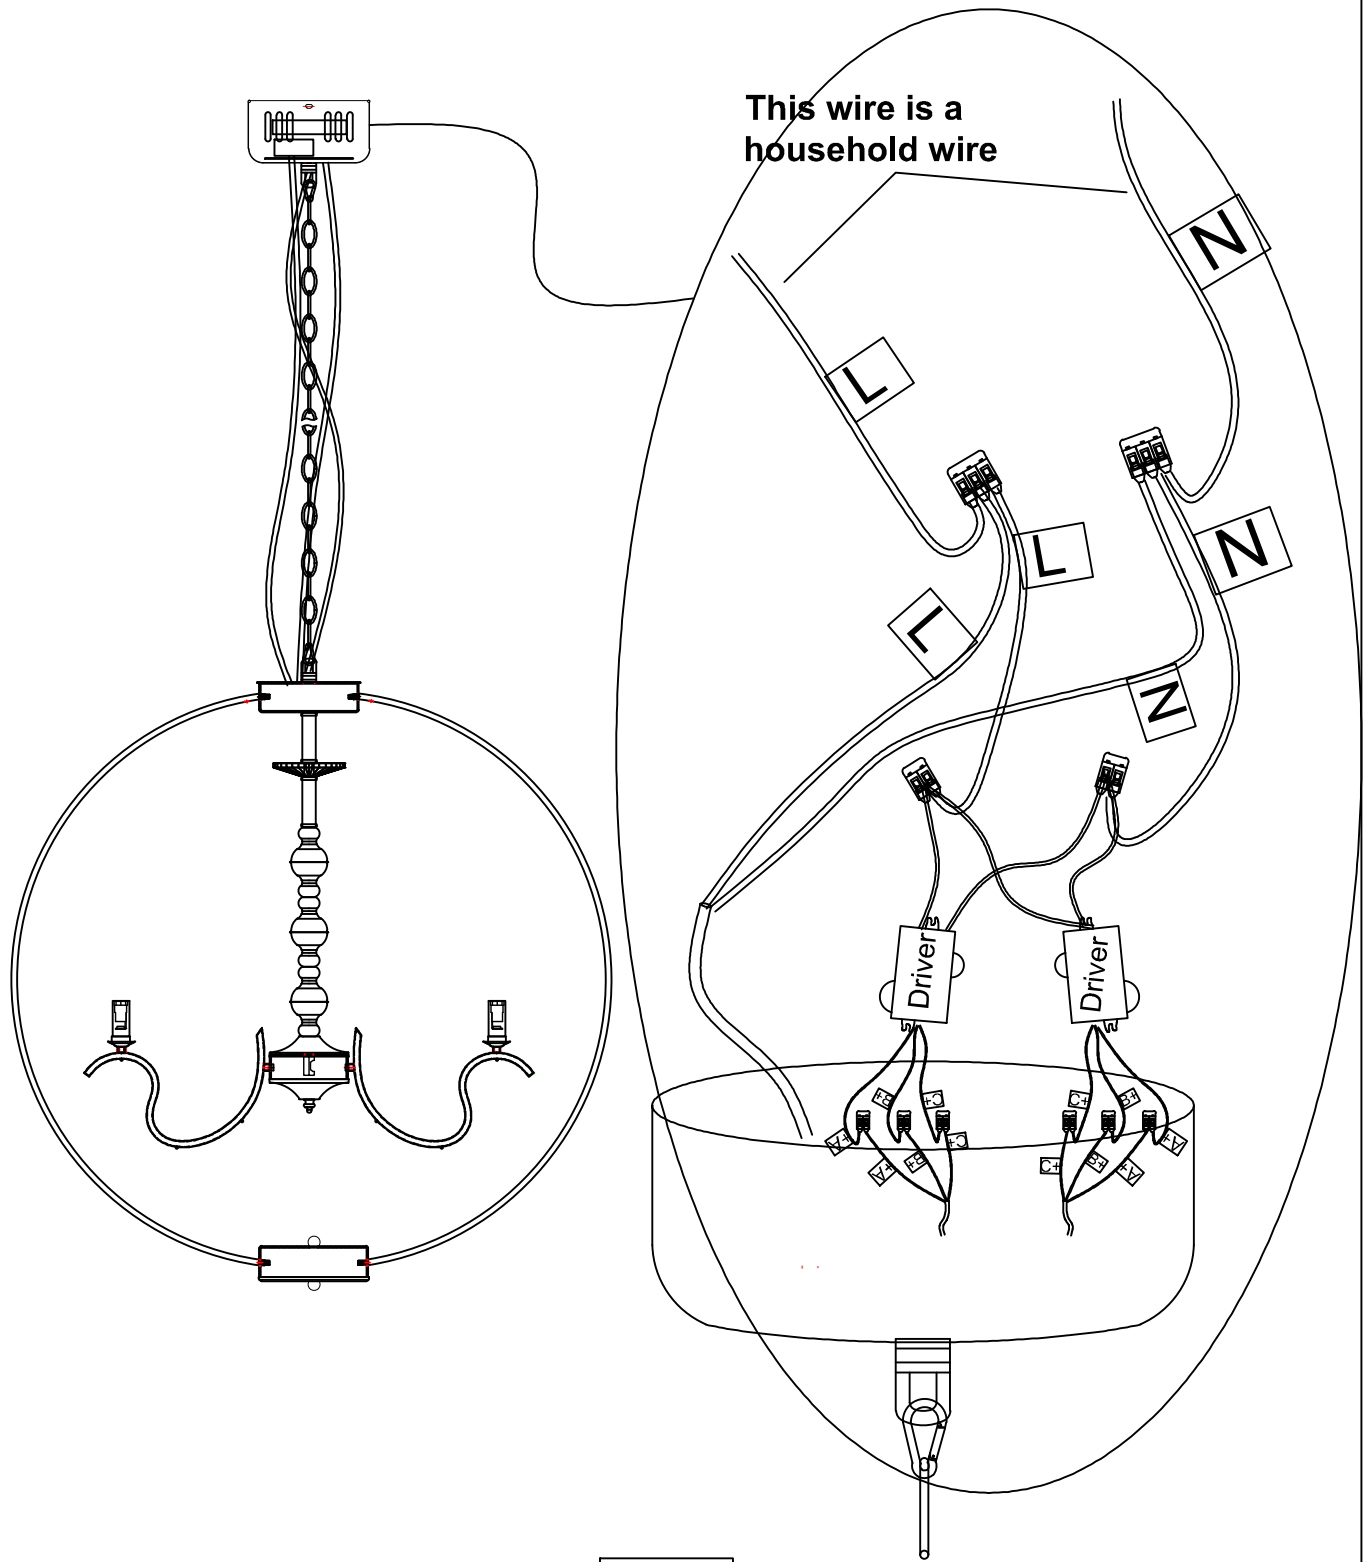


Figure 11

STEP13 - loosen Crossbar.




Figure 13

STEP15 - Install Ceiling Canopy to Ceiling.

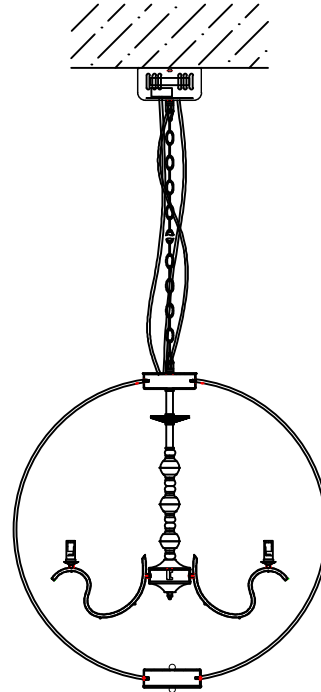


Figure 15

STEP 14 - Attach Crossbar to Outlet Box.

A.Pass the supply wires through the Crossbar (EE).
 Attach the Crossbar (EE) to the Outlet Box (CC)
 with the head of the Green Ground Screw facing you.
 Secure it with Outlet Box Screws (not included).
 Tighten until snug.

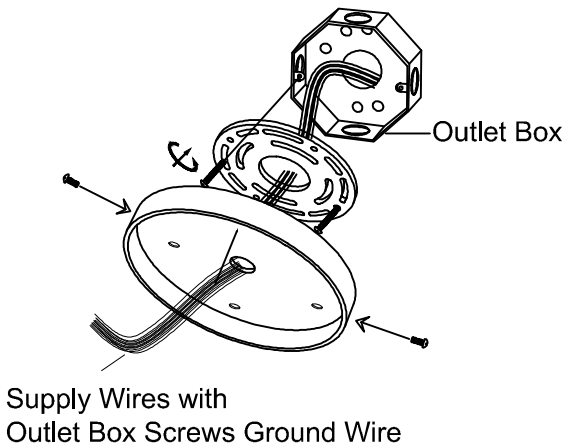


Figure 14

STEP16 - Install Bulbs ,Crystal ,bobeches and Socket sleeve

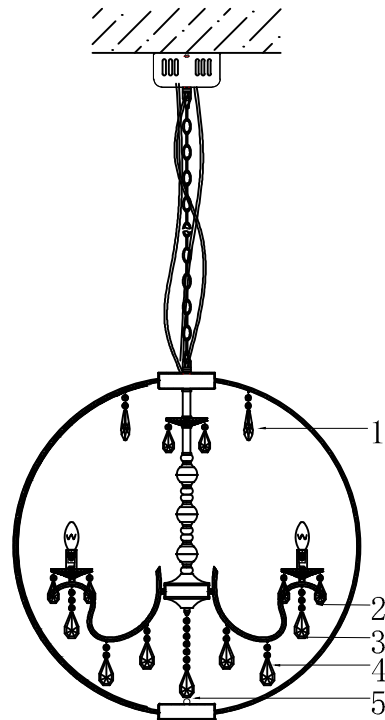


Figure 16