


Collection:Nota

Installation manual for: LD4059W8 W7.9"H8.7"E10.8"L1

Installation instructions:

- 1. Using the screw (P3) secure the mounting bracket (P1) to the junction box.
- 2. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 3. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 4. "E" wire from the fixture is attached to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 5.M4 screw (P2)pass through the holes in canopy plate and tighten by nut (P6).
- 6.Install the metal ring (P12) and lampshade (P11) then tighten by lamp holder ring (P13).
- 7.Install the bulb(not included) in lamp holder (P10). The end!

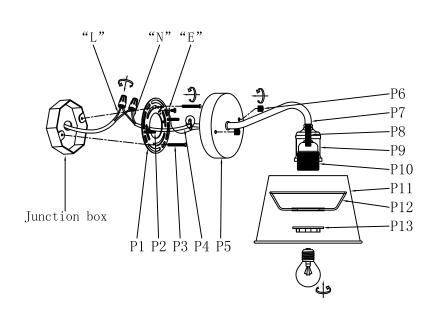

PARTS LIST

part	picture	Description	Qty	Check list
P1		Ø 4.0″ Mounting bracket	1	
P2		M4 Screw	2	
Р3		5/32-32 Screw	2	
P4	~	Power Cord 9" 20# Black+white	1	
P5		¢ 4.7″ Back plate	1	
Р6	•	Nut	2	
P7		Metal arm	1	
Р8		Threaded pipe	1	
Р9		Lamp cup	1	
P10		E26 Lamp holder	1	
P11		7.9"Lampshade	1	
P12		Metal ring	1	
P13	т.	E26 Lamp holder ring	1	

 $^{\prime\prime}$ L $^{\prime\prime}$ = Hot wire

"N" = Neutral wire

 $^{\prime\prime}$ E $^{\prime\prime}$ = Ground wire