

Collection:Ollie


Installation manual for:

LD7017C W26.8"*H4.7"*E3.5"L4

Installation instructions:

- l. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N" wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Secure mounting bracket to the junction box.

 5.Insert screws (P2) in side of top unit the mounting bracket.
- 6. With knurled nut (P10), plastic gasket (P9) crystal cloth (P8)
- lock on the lamp
- screw (P3) 7.Lock the lamp body on the mounting bracket (P1) on the wall with a flat head
- 8.Install G9 light source.(Bulbs not supplied)

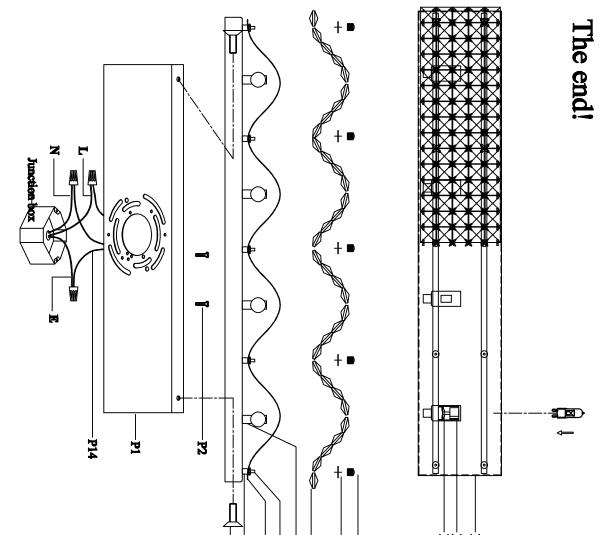

PARTS LIST

						2					-P13			
P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	Part
		(0)			0				}		Д			Picture
18# Internal single insulation black and White Tellon Wire 19.8"	Canopy(L26.4**W4.7**E1*, Stainless steel)	\$0.9"9H1.7" Lampholder, Iron (Chrome)	G9 Ceramic Socket	Knurled nut	Plastic gasket	Crystal cloth	Square Iron Part	M3 Round head screw	Stainless steel bar L31.1"	Glass plate	Flat head Screw	Mounting bracket screw	Mounting bracket (L20,47"*W4,45"*EH0,67")	Description
-	1	4	4	10	10	1	4	10	2	10	2	2	<u>,</u>	Øy
														Check list

"N" = Neutral wire
"E" = Ground wire "L" = Hot wire