

Collection: Flynx


Installation manual for:

LD7043D17BK D16.9" H16.8" L4

## **Installation instructions:**

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Twist tube(P10) to metal parts(P11), connect chain(P6) to Toothed ring (P7), connect chain(P6) to canopy(P4)
- 6. Separate and adjust the lamp arms, Use the screw(P3) to lock the lamp body to the mounting bracket(P1) on the ceiling.
- 7.Put the socket tube(P13) on the socket (P14) ,and install E12 light source.(Bulbs not supplied)

The end!

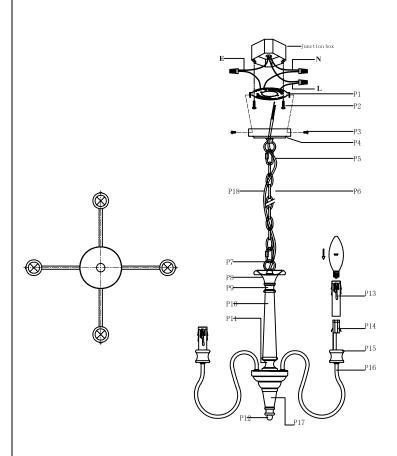

Part	Picture	Description	Qty	Check	list
P1		mounting bracket Φ4.53″*H0.59″	1		
P2	ammm2))	Mounting bracket screw	2		
Р3	1	Screw	2		
P4		Сапору ( <b>Ф</b> 4.72"*H1.02")	1		
Р5	G	Activity buckle L1.5"*W0.78"*⊄0.15"	2		
Р6	$\bigcirc$	Hanging chain(CHAINO4P) 1.1.5"*WO.78"*\$0.15"(Total lenghth 59")	1		
P7		Toothed ring W1.3"*H1.6", M10	2		
Р8	$\overline{}$	Anti-edge cover Φ3.54"*H1.46"	1		
Р9	耳	metal parts Φ1.3"*H1.0"	1		
P10		Conical tube Ф1.57"+Ф0.98"*H7.87"	1		
P11	□	metal parts Φ1.7"*H1.5"	1		
P12	0	nut Ф0.79″*H0.67″,M10	1		
P13	<b>-</b>	Socket tube Φ0.98"*H3.94"	4		
P14		E12 holder	4		
P15		metal parts Φ1.6"*H1.4"	4		
P16	U	Lamp arm L6.6"*H7.6"	4		
P17	7	wire box cover Φ4.1"*H5"	1		
P18	رسع	UL18#SVT-3, L78. 7"	1		

"L" = Hot wire

"N" = Neutral wire

"E" = Ground wire