


Assembly Instructions: 6068-SF/4P (Marco)

IMPORTANT:

- ALL INSTALLATION WORK SHOULD BE DONE BY ACCREDITED PROFESSIONAL.
- SHUT OFF POWER SUPPLY AT FUSE OR CIRCUIT BREAKER!
- USE ONLY THE SPECIFIED BULBS. DO NOT EXCEED THE MAXIMUM WATTAGE!

For Customer Service, please contact the place of purchase.

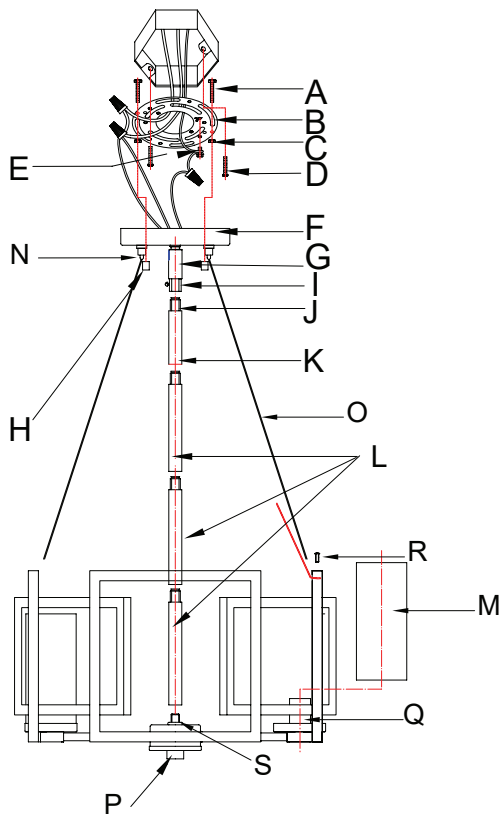

PREPARING FOR INSTALLATION

Remove all of the contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, even the mounting strap.

1. Take the mounting strap assembly from the parts bag. Mounting strap (B) contains several pairs of threaded holes. Find the pair of holes that matches the spacing of the holes on the junction box. Tighten nuts (C) that hold mounting screws (A) to mounting strap (B).

2. Place mounting strap (B) over the junction box so that mounting screws (A) are pointing down. Secure mounting strap (B) to the junction box with mounting screws (D) and a screwdriver. Tighten the screws securely.

ASSEMBLING THE FIXTURE

3. By measuring, determine the correct number of rods needed for proper hanging height. There are 3 optional 12 inch rods (L) and a 6 inch rod (K) included for each side of the fixture. To lengthen the fixture to a pendant, add additional rods. If additional rods are needed, contact the place of purchase to order. To shorten the fixture to a semi-flush, trim the wires to the desired length adding at least 8 to 10 inches of wire to the desired length and slide any excess rods off the fixture's wires to discard. You must use at least the provided 6 inch rod (L) to hang the fixture.

4. Thread the wires through the rods and pull the wires until taut before threading the rods together. Thread bottom rod (K or L) onto post (S) of the fixture's body (P). Thread the threaded nipple of the top rod into swivel post (I) of canopy (F). Pull the fixture wires through the top of the canopy. Connect steel cables (O) to posts (N) and (R). Adjust the wires until frame (P) is level. Press the cylinder lock at the top cap to release the steel cable (O).

How to Identify the Fixture's Wires			House Wires
Hot	Neutral	Ground	
Smooth	Ribbed	Bare Metal, Green, or Green Inner Thread	
Black	White		
Black Inner Thread	White Inner Thread		

CONNECTING THE WIRES

5. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (or smooth); white to white (or ribbed); ground to ground (green or copper). Twist the ends of the wire pairs together, then twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire (green or copper) from the junction box, locate ground screw (E) on mounting strap (B) and wrap the fixture's ground wire around the green ground screw (E). Use a screwdriver to secure ground screw (E) onto the mounting bracket. Tuck all wires neatly into the junction box.

FINISHING THE INSTALLATION

6. Raise canopy (F) to the ceiling so that mounting screws (A) protrude through the openings of canopy (F). Thread decorative nuts (G) onto mounting screws (A).

7. Install the candle sleeves, then glass (N) before installing the light bulbs (not included) in accordance with the fixture's specifications. Do not exceed the maximum recommended wattage.

Your installation is complete. Turn on the power and test the fixture.

CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.