

#### **Features**

- · Dimmable LED task lighting
- · Integrated touch sensor control with memory
- Energy efficient LED lighting 6000K
- 1800 Lumens
- CRI 90+
- Integrated Defogger

#### Construction

- · Quality polished edge mirror
- · Single phase wire installation
- 5 MM Silver Backed Copper Free
- Installation Either Surface Mount (Side Mirror Trim Panels included) or Recessed
- Includes installation hardware

## **Codes/Standards Applicable**


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

## **Electrical System**

- 120Vac, 60Hz, 31W
- Electric Current: 0.26A
- Wattage: 31W

### Model

Kinetic 3030





### **Outlet**

- Performance Requirements: Contains the required Supervisory Circuit with the Auto-Monitoring Function as noted by UL 1310
- Input Voltage: Min 112Vac, Nom 125Vac, Max 137Vac
- Frequency: 60Hz
- Front Receptacle Current: 102-132VAC Nominal 15A
- USB Output Current: 5VDC Nominal 4A




### **CABINET CONFIGURATION**



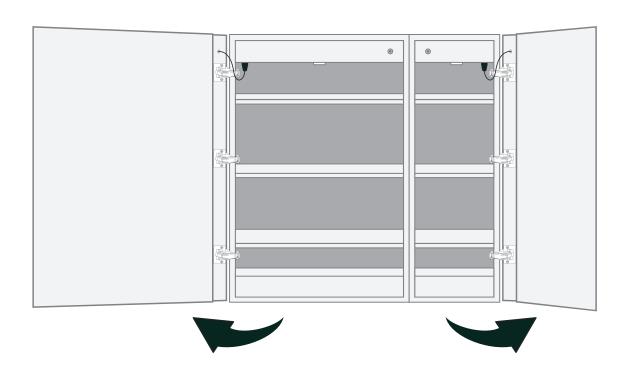





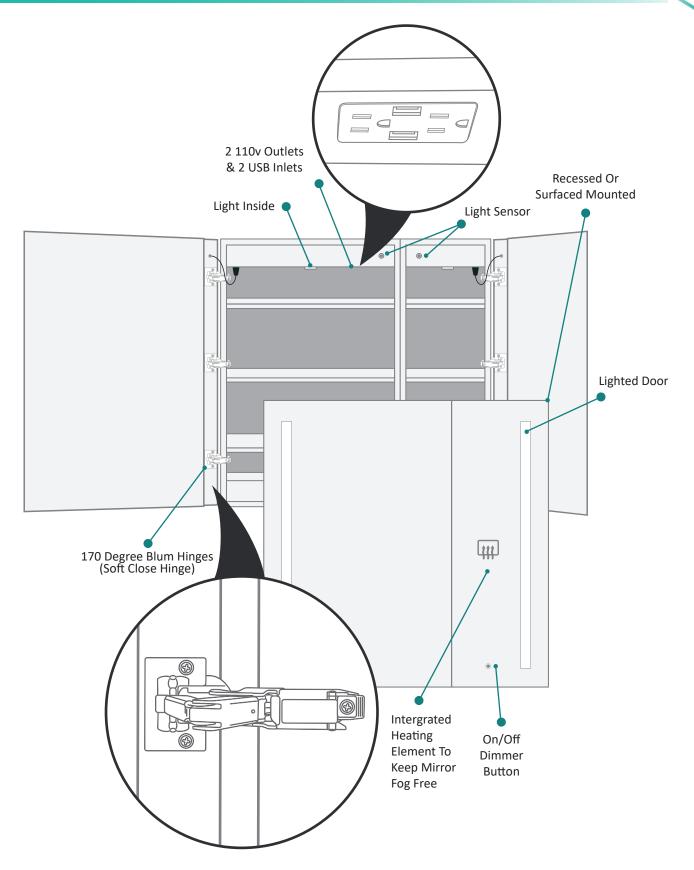




### **SURFACE MOUNT**

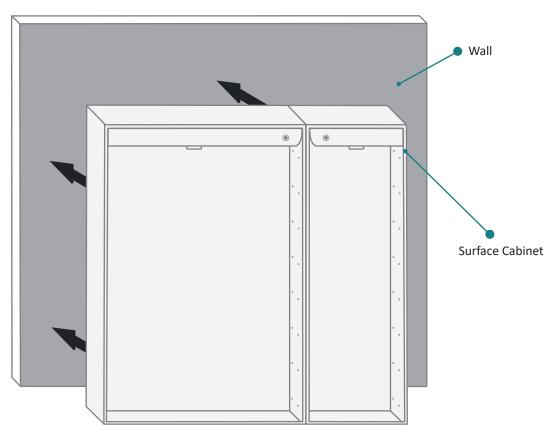







#### **FRONT & BACKS**

MODEL	А	В	С	D	Е	F	G	Н
KINETIC3030	30	30	30	30	1-1/8	10	1-1/8	5



### **RECESS MOUNT**

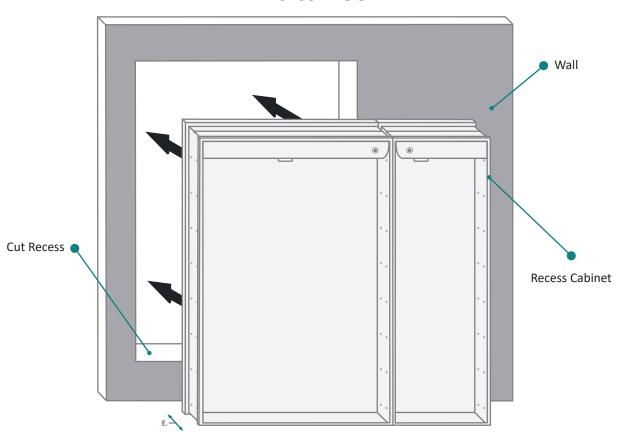

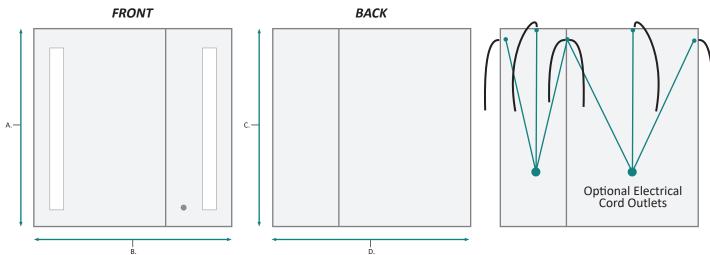


#### **FRONT & BACK**

MODEL	А	В	С	D	Е
KINETIC3030	30	30	29-1/8	19-1/8	3-1/2




### RECESS INSTALLATION OPTIONAL ELECTRICAL CORD LOCATIONS

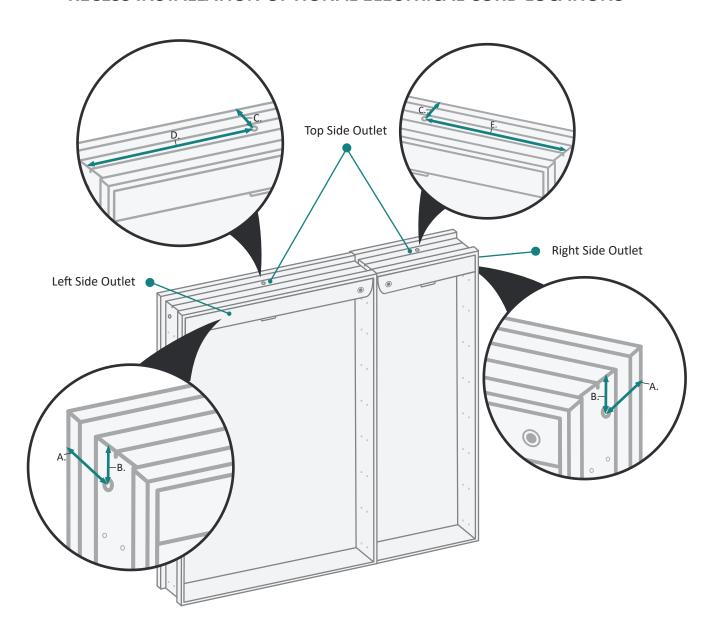

#### **ELECTRICAL CORD LOCATIONS**


MODEL	А	В	С	D	Е
KINETIC3030	1-1/8	1-1/8	1-1-8	12	5





#### **DOOR & CABINET**

MODEL	А	В	С	
KINETIC3030	7/8	3-1/2	5	

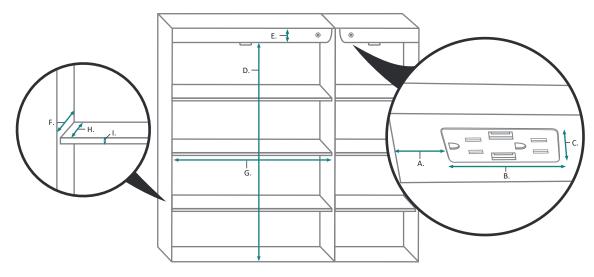

#### **INTERIOR CABINET**

MODEL	А	В	С	D	Е	F	G	Н	- 1
KINETIC3030	3-3/4	5-5/8	1-1/4	27-3/4	2-1/4	3-5/8	18-1/4	2-3/8	3/8