

SOL 30 Wall Mirror - Specification Sheet

Features

- Dimmable LED task lighting
- Integrated touch sensor control with memory
- Energy efficient LED lighting 6000K
- 2660 Lumens
- CRI 90+
- Integrated Defogger

Construction

- Quality polished edge mirror
- Single phase wire installation, silver backed, copper free
- Construction for surface mounting
- Includes installation hardware

Codes/Standards Applicable


- Conforms to UL Std. 962
- Cert. to CSA Std. C22.2 No.250.0-08
- ETL Intertek 5004931

Electrical System

- 120Vac, 60Hz, 37.5W
- Electric Current: 0.31A
- Wattage: 29.7W

Model


- SOL 30

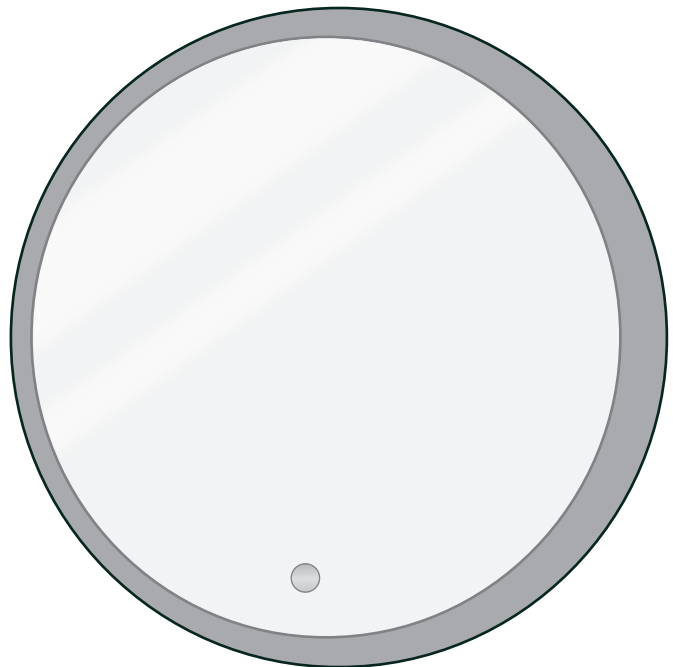

SOL30 Wall Mirror - Specification Sheet

Dimensions

- Height: 30"
- Width: 30"
- Depth: 1-9/16"

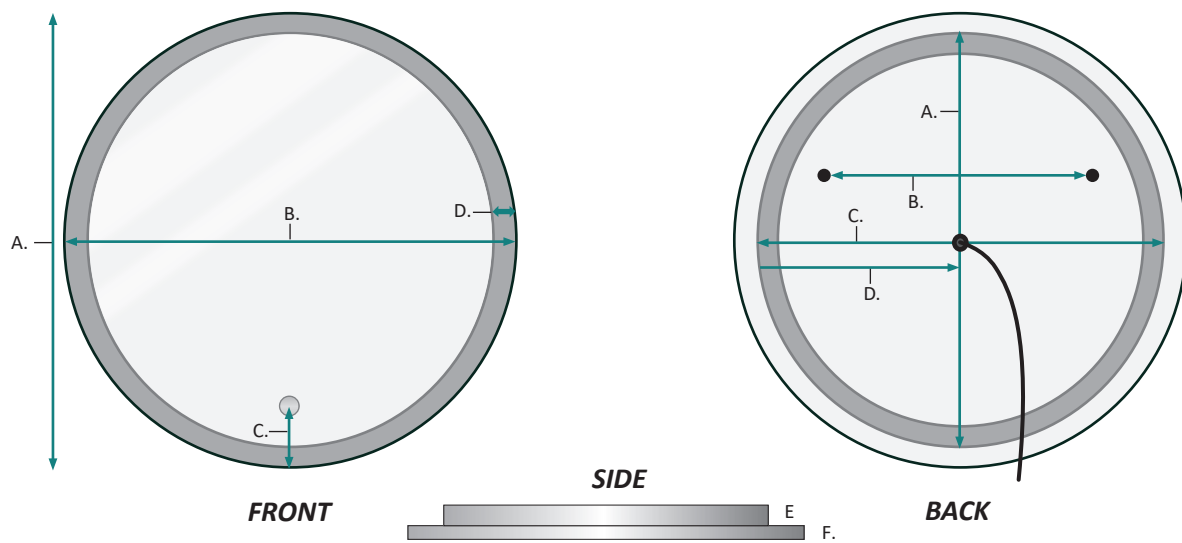

FRONT & SIDE

| MODEL | A | B | C | D | E | F |
|-------|----|----|-------|-------|-------|-----|
| SOL30 | 30 | 30 | 4-1/2 | 1-1/4 | 1-3/4 | 1/4 |

BACK

| MODEL | A | B | C | D | E | F |
|-------|--------|--------|--------|--------|-------|-----|
| SOL30 | 26-1/2 | 21-1/2 | 26-1/2 | 13-3/4 | 1-3/4 | 1/4 |