PD19347 Specification Sheet

Pendant




BK - Black

PROJECT						
DATE		ТҮРЕ				
Voltage	Watt	LED Lumens	Delivered Lumens	Finish(es)	Color Temp CRI(Ra) Dimming Rated Life	3000K >90 100%-10% 50,000 hours
120V 120V 120V 120V 120V	56W* 56W* 56W* 56W*	5040lm* 5040lm* 5040lm* 5040lm*	3413lm* 3413lm* 3413lm* 3413lm*	AN - Antique Brass AS - Antique Silver BK - Black WH - White		

*Preliminary figures



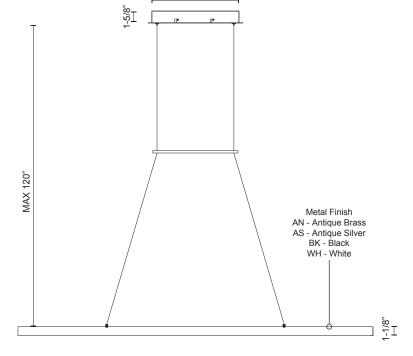


11-7/8"

Product Descriptions


Extruded rectangular aluminum rolled into stadium shape. Matte powder-coat or plated brushed finish. Flexible silicon opal diffuser

Product Details

High system efficacy. Low total life cycle cost. ETL Listed. 5-years warranty. Complete warranty terms located at: *www.kuzcolighting.com/warranty* Utilizes our LED Driver Light Engine. LED Driver within canopy. Up and Down light distribution. Max. cable length of 120". Dimmable with ELV or TRIAC dimmer (not included) Custom options available

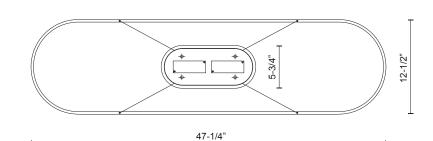

Comments:



19054 28th Avenue Surrey, BC, Canada V3Z 6M3 20190107

nue T: 604 538 7162 ada F: 604 538 7196 W: Kuzcolighting.com c C Usus Intertek