

# WS18248

Specification Sheet

## Wall Sconce



| PROJECT |      |            |                  |                     |                         |
|---------|------|------------|------------------|---------------------|-------------------------|
| DATE    |      |            |                  | TYPE                |                         |
| Voltage | Watt | LED Lumens | Delivered Lumens | Finish(es)          |                         |
| 120V    | 40W* | 3885lm*    | 1940lm*          | BK - Black          | Color Temp 3000K        |
| 120V    | 40W* | 3885lm*    | 1940lm*          | BN - Brushed Nickel | CRI(Ra) >90             |
| 120V    | 40W* | 3885lm*    | 1940lm*          | CH - Chrome         | Dimming 100%-10%        |
| 120V    | 40W* | 3885lm*    | 1940lm*          | GD - Gold           | Rated Life 50,000 hours |
| 120V    | 40W* | 3885lm*    | 1940lm*          | WH - White          |                         |

\*Preliminary figures



BK - Black

Metal Finish  
 BK - Black  
 BN - Brushed Nickel  
 CH - Chrome  
 GD - Gold  
 WH - White

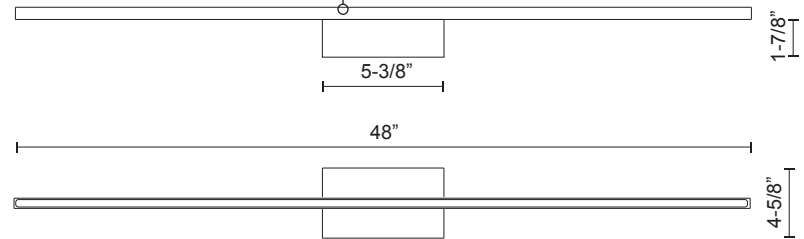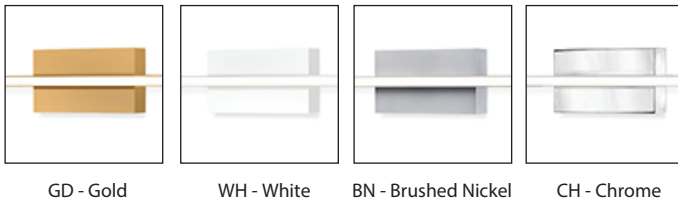

### Product Descriptions

Square profile linear aluminum with rectangular wall mount. Optional adapter plate for larger junction box  
 Inset opal polymeric diffuser. Finely textured plate or powder-coat finish

### Product Details

High system efficacy. Low total life cycle cost. ETL Listed.

5-years warranty.

Complete warranty terms located at:

[www.kuzcolighting.com/warranty](http://www.kuzcolighting.com/warranty)

Utilizes our LED Driver Light Engine.

LED Driver within canopy.

Outward-emitting light.

Dimmable with ELV or TRIAC dimmer (not included)

Custom options available.

Canopy dimensions:  
 L5-3/8"x W4-5/8"x H1-7/8"

Comments: