


NL-3365

Adjustable Gimbal with Metal Ring

TRIM DIMENSIONS

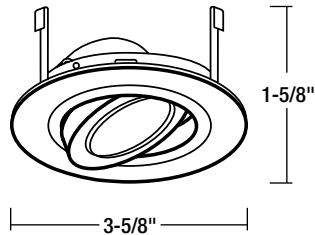

Trim OD: 3-5/8"
Height: 1-5/8"

FEATURES

Trim

Metal trim with adjustable ring can be adjusted up to 35°. Adjustable ring allows lamp to be mounted on top of the trim. Trim ring available in metal, may also be used with custom combination of plastic or metal ring finishes.

Mounting

Trim includes three trim clips that securely mount trim in housing.

Compatible Housings

Compatible with Low Voltage housings.

See individual specification sheets for more information.

Lamp

Low Voltage

IMPORTANT: DO NOT USE GLASS LENS (PROVIDED) WHEN ALREADY USING LAMP WITH GLASS COVER
20W-50W 12V MR16 (NL-301 Series; NLIC-301 Series; NLR-304 Series)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.


Adjustable Gimbal with Metal Ring

- NL-3365B: Black Adjustable Gimbal with Black Metal Ring
- NL-3365BZ: Bronze Adjustable Gimbal with Bronze Metal Ring
- NL-3365C: Chrome Adjustable Gimbal with Chrome Metal Ring
- NL-3365CO: Copper Adjustable Gimbal with Copper Metal Ring
- NL-3365G: Gold Adjustable Gimbal with Gold Metal Ring
- NL-3365N: Natural Metal Adjustable Gimbal with Natural Metal Ring
- NL-3365W: White Adjustable Gimbal with White Metal Ring


Type
Project
Catalog No.
Lamp/Wattage

HOUSING DIMENSIONS


NL-301 SERIES

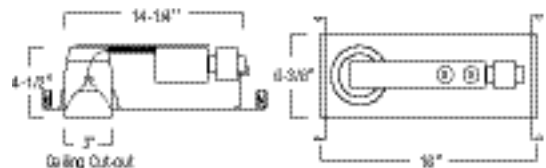

NLIC-301 SERIES

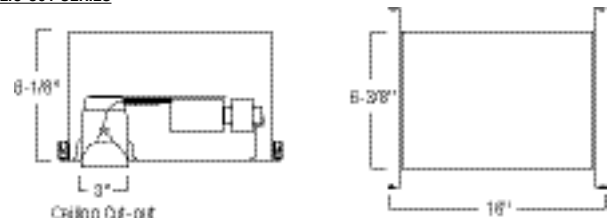

NLR-304 SERIES

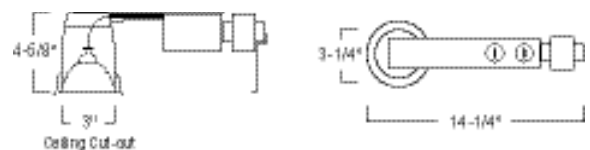

Compatible Housings

LOW VOLTAGE					
NL-301QAT/20	Non-IC AT New Const., Mag.	20W MR16	W: 6-3/8"	L: 16"	H: 5-5/8"
NL-301QAT/37	Non-IC AT New Const., Mag.	37W MR16	W: 6-3/8"	L: 16"	H: 5-5/8"
NL-301QAT	Non-IC AT New Const., Mag.	50W MR16	W: 6-3/8"	L: 16"	H: 5-5/8"
NL-301AT/1EL	Non-IC AT New Const., Elec.	50W MR16	W: 6-3/8"	L: 16"	H: 5-5/8"
NLIC-301QAT/20	IC Air-Tight New Const., Mag.	20W MR16	W: 6-3/8"	L: 16"	H: 8-1/8"
NLIC-301QAT/37	IC Air-Tight New Const., Mag.	37W MR16	W: 6-3/8"	L: 16"	H: 8-1/8"
NLIC-301QAT	IC Air-Tight New Const., Mag.	50W MR16	W: 6-3/8"	L: 16"	H: 8-1/8"
NLIC-301AT/1EL	IC Air-Tight New Const., Elec.	50W MR16	W: 6-3/8"	L: 16"	H: 8-1/8"
NLR-304QAT/20	Non-IC Air-Tight Remodel, Mag.	20W MR16	W: 4-1/4"	L: 11-1/4"	H: 5-5/8"
NLR-304QAT/37	Non-IC Air-Tight Remodel, Mag.	37W MR16	W: 4-1/4"	L: 11-1/4"	H: 5-5/8"
NLR-304QAT	Non-IC Air-Tight Remodel, Mag.	50W MR16	W: 4-1/4"	L: 11-1/4"	H: 5-5/8"
NLR-304AT/1EL	Non-IC Air-Tight Remodel, Elec.	50W MR16	W: 4-1/4"	L: 11-1/4"	H: 5-5/8"