

NYLM-2

2" iLENE LED Mini Cylinders

Source: 15W LED
1000lm

Type
Project
Catalog No.
Notes

PRODUCT DESCRIPTION

iLENE Series of dedicated LED Mini Cylinders are available in three sizes and outputs, with pendant or surface mount options. Using Cree® COB technology, the iLENE produces 90+ CRI with excellent cut-off for visual comfort. Each cylinder includes three field-changeable optics for spot, narrow flood and flood (installed) beam spreads.

FEATURES

- 1000lm / 15W LED
- Cree® LED COB or Comfort Dim Technology
- Surface or pendant mounted
- 2700K, 3000K, 3500K, 4000K or Comfort Dim @ 90+ CRI
- Flood (installed), narrow flood and spot optics included
- Triac, ELV or 0-10V dimming
- Black, silver or white cylinder finish
- ENERGY STAR® certified
- 5-year limited warranty

SPECIFICATION

Construction: Extruded aluminum cylinder with aluminum vented top. Driver is mounted in the canopy to dissipate heat away from the LED module and extend life expectancy.

Reflector: Deep set reflector for minimal aperture brightness. Reflector finish matches cylinder finish.

Optic: Each iLENE cylinder includes three field-changeable optics for spot, narrow flood and flood (installed) beam spreads.

Installation: Canopy mounts on a junction box. Cable pendant includes 8' field adjustable coax cable. (Driver located in canopy)

ELECTRICAL

Voltage: 120V or 120V/277V (must specify)

Lumens / Wattage: 1000lm / 15W (725lm with Comfort Dim)

Color Temperature: 2700K, 3000K, 3500K or 4000K

Comfort Dim: Comfort Dim color tunes the temperature from a bright 3100K, to a romantic and comfortable 2000K on a gradual, even curve. Comfort Dim provides up to 725lm.

CRI: 90+CRI

Dimming: Triac, ELV or 0-10V (must specify)


[Click Here](#) or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab

LABELS AND LISTINGS

- cULus Listed for Damp Locations
- ENERGY STAR® Certified
- [5-Year Limited Warranty](#)




PRODUCT IMAGES AND DIMENSIONS

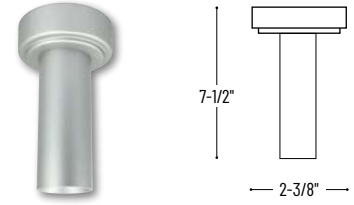

NYLM-2SC

2" iLENE LED Mini Cylinder, Surface Mounted

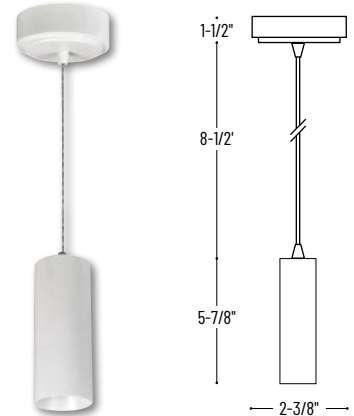

NYLM-2C

2" iLENE LED Mini Cylinder, Cable Pendant Mounted

2" iLENE LED Mini Cylinder

Series	Mounting Option	CCT	Finish	Input Voltage / Dimming
NYLM-2 = 2" iLENE	C = Cable Pendant SC = Surface	27X = 2700K	BB = Black	LE3 = 120V input; Triac/ELV dimming
		30X = 3000K	SS = Silver	LE4 = 120V input; Triac/ELV or 0-10V dimming
		35X = 3500K	WW = White	277V input; 0-10V dimming
		40X = 4000K		
		CD = Comfort Dim (3100K to 2000K)		

Example: **NYLM-2C30XBBLE4** = 2" iLENE LED Mini Cylinder, Pendant Mounted, 3000K, Black finish, 120V/277V input; Triac, ELV or 0-10V dimming