

CHAMELEON Wall Sconce

3-521-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-40 Aged Brass



-14 Polished Chrome




-22 Oiled Bronze



-24 Satin Nickel

LIGHT SOURCE 1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER 12.4W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 552 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 350mA, 14.7W max power
DIMMING TRIAC and ELV dimming at 120V AC;
 0-10V dimming, 100% to 1% current output
CONSTRUCTION Plated Steel and Acrylic
DIFFUSER - Matte White Acrylic
FINISHES Polished Chrome (-14), Oiled Bronze (-22),
 Satin Nickel (-24), Aged Brass (-40)
MOUNTING 4" Octagonal J-Box*
 *Deep J-Box (Required to house driver)
STANDARDS
 UL Dry/Damp listed, ADA Compliant, Conforms to
 UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

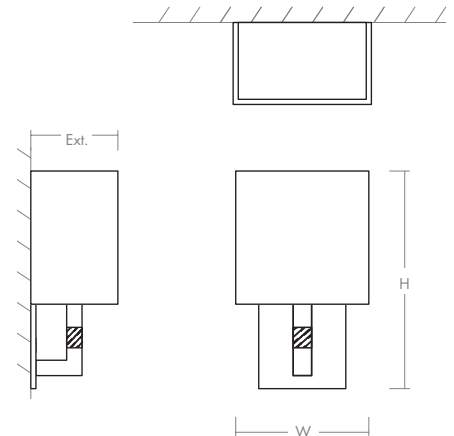

DIMENSIONS

W: 8.00"
H: 11.75"
Ext: 4.00"
M.C: 5.875" From top of fixture

Order example for standard fixture:
3-521-24 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V to 277V
 Order example for optional color temperatures: **3-521-2724**
 27: 2700K, 35: 3500K, 40: 4000K

