

BALANCE Vanity
3-547-xx-BPxx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____




-24 Satin Nickel



-20 Polished Nickel

LIGHT SOURCE 1 x 11.7W LED, 3000K, CRI 90
LUMINAIRE POWER 14.2W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 1020 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 350mA, 14.7W max power
DIMMING TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION Plated Steel and Acrylic
DIFFUSER - Matte White Acrylic
FINISHES Polished Nickel (-20), Satin Nickel (-24)
MOUNTING 4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
STANDARDS UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

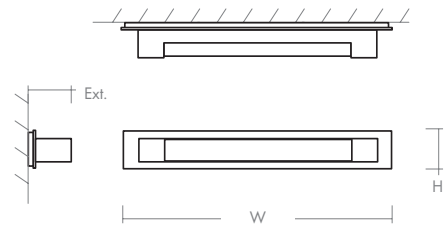

DIMENSIONS
W: 29.00"
H: 4.50"
Ext: 4.00"
M.C: 2.25" From top of fixture

Order example for standard fixture:

3-547-24-BP24

(x- Voltage - xxx-Sequence # - xx-Finish - BPxx- Backplate Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-547-2724-BP24**

27: 2700K, 35: 3500K, 40: 4000K

