

BALANCE Vanity
3-549-xx-BPxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-20 Polished Nickel



-24 Satin Nickel

- LIGHT SOURCE** 2 x 11.7W LED, 3000K, CRI 90
- LUMINAIRE POWER** 27.8W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 2022 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 700mA, 29.4W max power
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Polished Nickel (-20), Satin Nickel (-24)
- MOUNTING** 4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

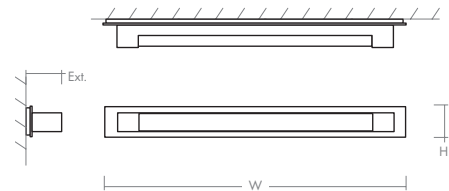

DIMENSIONS

- W:** 52.75"
- H:** 4.50"
- Ext:** 4.00"
- M.C:** 2.25" From top of fixture

Order example for standard fixture:

3-549-24-BP24

(x- Voltage - xxx-Sequence # - xx-Finish - BPxx- Backplate Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-549-2724-BP24**

27: 2700K, 35: 3500K, 40: 4000K

