

**STYLUS Pendant**  
**3-67-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-24 Satin Nickel



-40 Aged Brass

<b>LIGHT SOURCE</b>	LED Array, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	23.6W at 120V
<b>RATED LIFE</b>	50000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 583 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	580mA, 21.25W
<b>DIMMING</b>	TRIAC Dimming
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	White (-6), Black (-15), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	ETL Dry listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

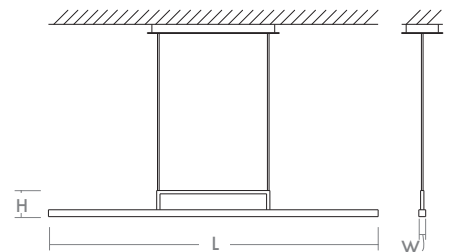

**DIMENSIONS**

**Canopy: 18.90" L x 5.90" W x 1.20" H**

**Fixture: 47.50" L x 1.00" W x 3.75" H**

**\* Hanging height adjustable with 8ft. cables**

Order example for standard fixture:  
**3-67-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V Only

