

# Model# HRD3088U

## Thor Kitchen 30-inch Professional Dual Fuel Range



### DIMENSION & WEIGHT

#### Product Dimension

	Product width	30"
Product height (from bottom to top of back splash)		38.47" - 39.47"
Product height (from bottom to top of side panel)		35.91" - 36.91"
Product depth (from back panel to bullnose)		27.86"
Product depth (from back panel to control panel)		26.47"
Product depth (from back panel to front of side panel)		24.19"
Depth of control panel (to the control panel face)		2.28"
Depth of control panel (to the bullnose)		3.67"
Cast iron cooking grate (W x L)		10 3/4" * 23"
Adjustable legs	Recommend not to exceed 1"	
Required Cutout Size (W x D x H)		30 1/8" x 24.19" x 35.91(+1)"
Oven Cavity Dimension	24" W * 15 1/4" H * 18" D	
Oven Rack Dimension	22 3/4" * 15 1/2"	
Distance between Oven Rack	2 1/8"	

### FEATURES

- Black Porcelain Drip Pan On Cook Top
- Heavy Duty Continuous Cast Iron Cooking Grates
- Automatic Re-ignition Safety Feature
- Blue LED Illuminated Knobs
- 4.2 cu.ft. Oven Capacity
- Stainless-Steel Professional Style
- Blue Porcelain Oven Interior
- 2 x Halogen Lights
- Commercial Convection Fan

12K	12K
18K	15K (650 BTU Simmer)

### BURNER PERFORMANCE

Total Number of Range Top Burners	4 Burners
Front Right (Dual Burner with simmer function)	15,000 BTU (650 BTU for Simmer)
Front Left (Single)	18,000 BTU
Rear Right (Single)	12,000 BTU
Rear Left (Single)	12,000 BTU

### OVEN PERFORMANCE



Oven Capacity	4.2 cu. Ft
Bake Power	850 W (Top) / 3,000 W (Bottom)
Broil Power	3,500 W

### TECHNICAL DETAILS


Fuel Type	Natural Gas / LP Convertible
Electrical Requirements	240V, 4-Prong 14-50R Power Outlet
Circuit Breaker (A)	30A
Frequency (Hz)	60 Hz

### ACCESSORIES (NOT INCLUDED)

LPKHRD3088U	Liquid Propane Gas Conversion Kit
TR30SS	30-inch Telescopic Rack
ITHRD3088U	30-inch Island Trim
RG1022	Cast Iron Reversible Griddle

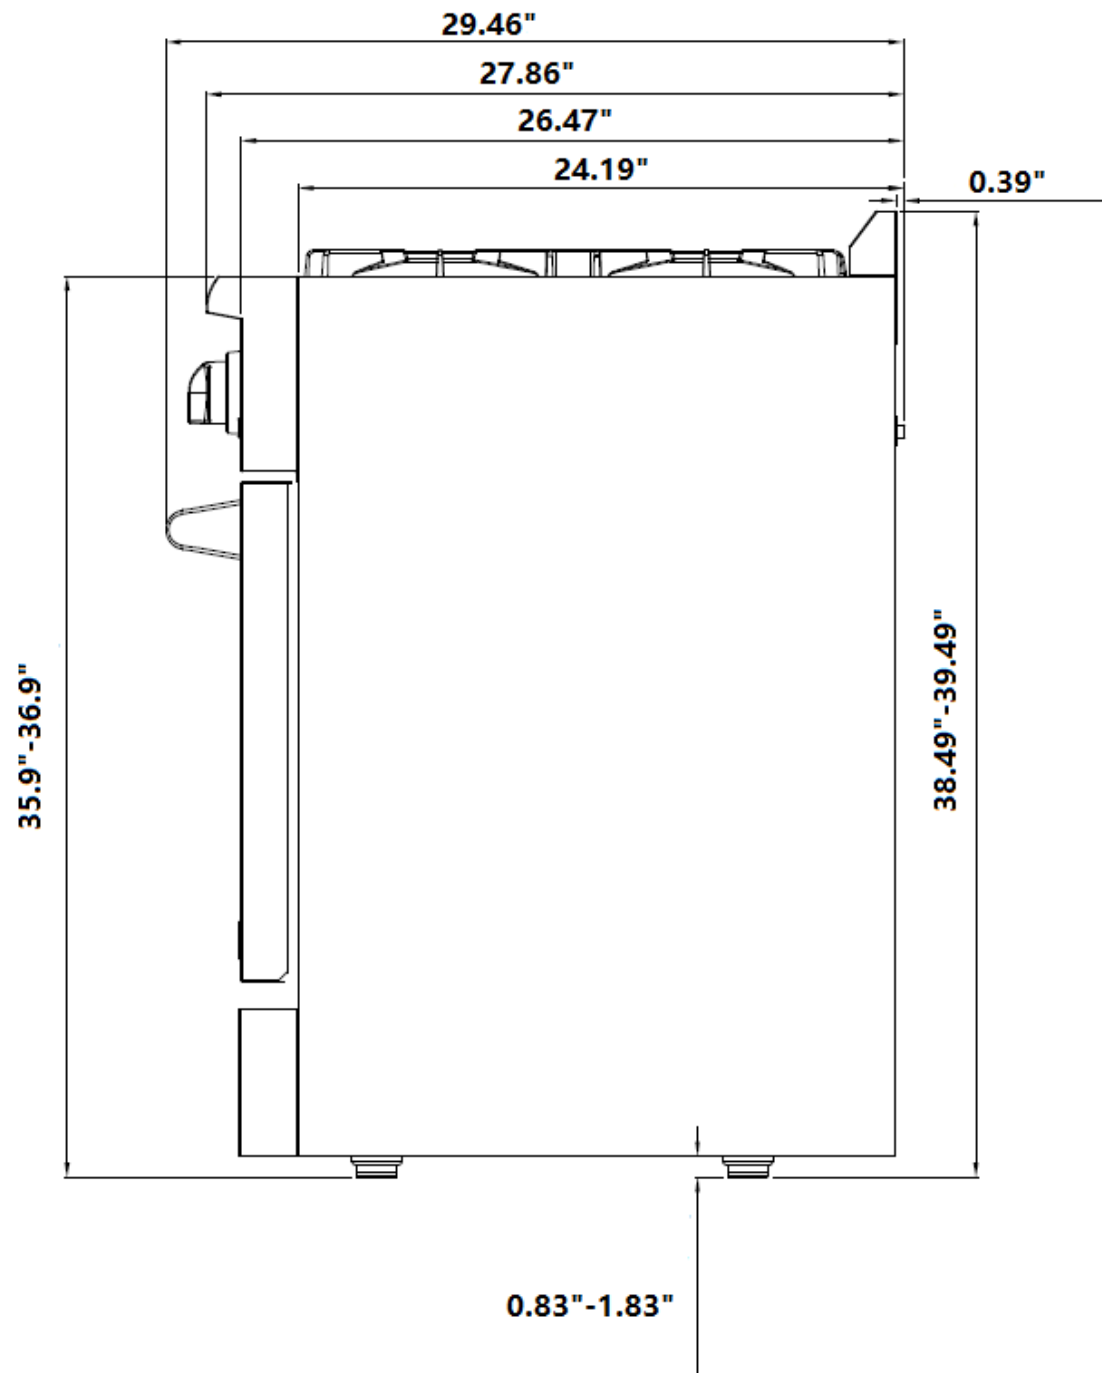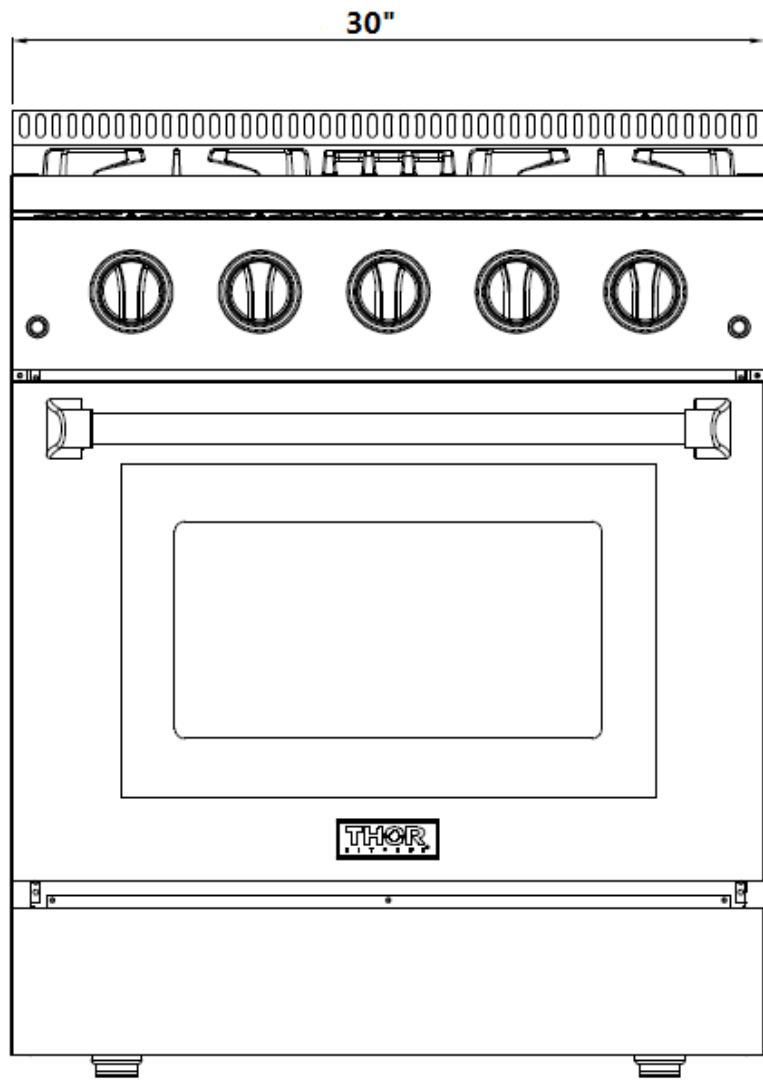

**NG: Input Pressure: 7 inches, Output Pressure: 5 inches**  
**LP: Input Pressure: 11 inches Output Pressure: 10 inches**  
**Regulator Location: Inside the kick Panel – Bottom Right**  
**Size of Regulator: ½ inch**

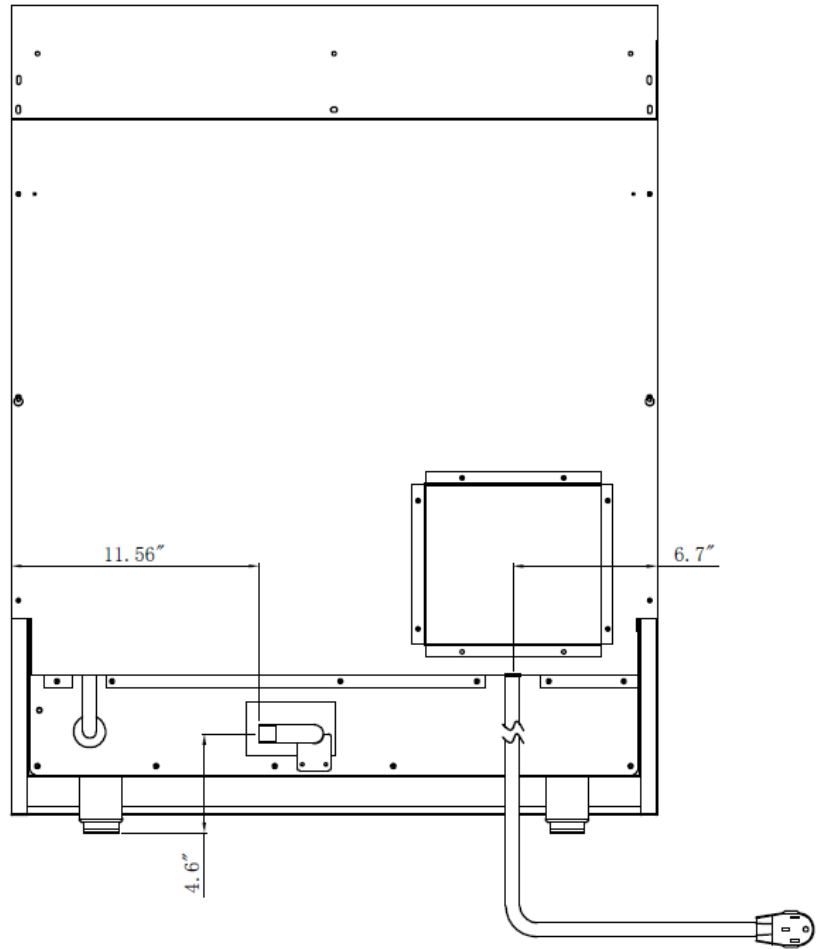

\*No 240V, 4-Prong 14-50R Power Outlet  
 Is provided with the product

