

## Round Showerhead 1 Mode

### FEATURES

- Maximum flow rate of 2.5 gpm (9.5 lpm)
- Balanced Comfort Wave™ technology with wide coverage rinse & wash
- 8.5" (220 mm) diameter spray face
- Rubber nozzles to prevent lime scale build up
- Includes matching escutcheon
- Shower arm sold separately

### COMPATIBLE COMPONENT *(Sold Separately)*

TS110MW16: Rain Shower Arm Wall Mount 16"

TS110MC6: Rain Shower Arm Ceiling Mount 6"

### COLORS/FINISHES

#CP Polished Chrome

#PN Polished Nickel

#BN Brushed Nickel

### CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1
- Certifications: IAPMO(cUPC), State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, DoE, and others
- Complies with CA Prop 65 warning requirements



### PRODUCT SPECIFICATION

Product shall be TOTO Model TBW01003U1#\_\_\_\_.  
Product shall have a maximum flow rate of 2.5 gpm (9.5 lpm). Product shall have balanced overlaying rinse and wash Comfort Wave Technology. Product shall have 8.5" (220 mm) diameter spray face. Product shall have rubber nozzles to prevent lime scale build up. Product shall include matching escutcheon. Product shower arm sold separately.



Please note the following components are sold separately



TS110MW16: Rain Shower Arm Wall Mount 16"



TS110MC6: Rain Shower Arm Ceiling Mount 6"

# TBW01003U1


## Round Showerhead 1 Mode

### SPECIFICATIONS


<b>Material</b>	ABS & POM
<b>Maximum Flow Rate</b>	2.5 gpm (9.5 lpm)
<b>Warranty</b>	Limited Lifetime for Residential Use One Year for Commercial Use
<b>Shipping Weight</b>	4.2 lbs
<b>Shipping Dimensions</b>	14-1/4" L x 10-3/4" W x 7" H

### INSTALLATION NOTES

Use with TS110MW16: Rain Shower Arm Wall Mount 16" or TS110MC6: Rain Shower Arm Ceiling Mount 6" (Sold separately)

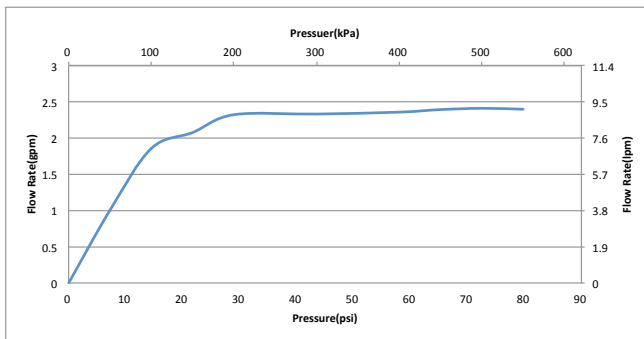

### DIMENSIONS

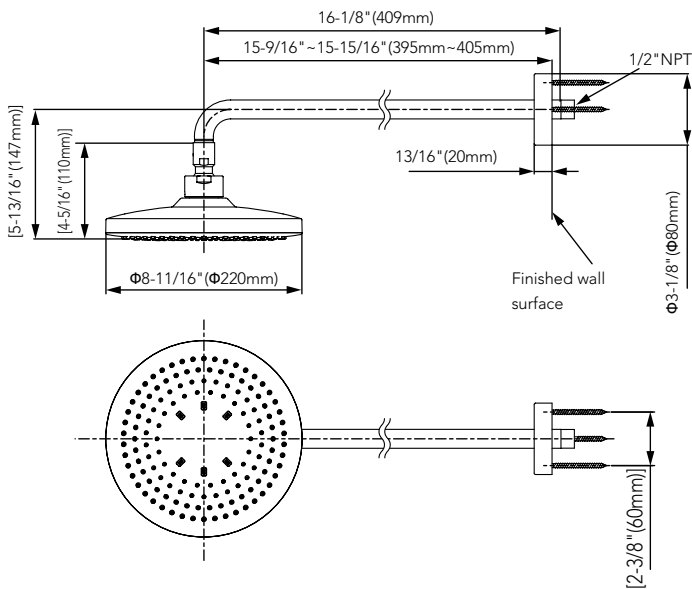

Note: The unit of above dimension is inch (mm); the dimension in [ ] is for reference only. Shower arm and mounting bracket are not included.

**TOTO**