


ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0153 / P0154 / P0241 / P0267

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.

Hardware Package (included):

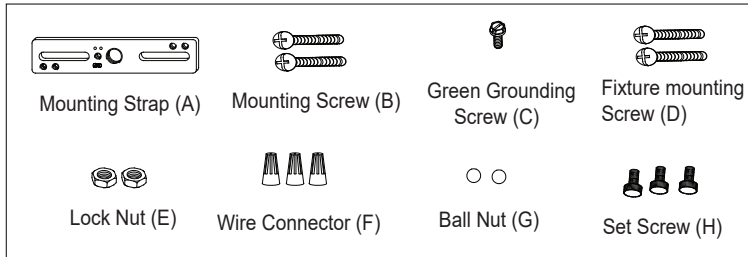

Installation Steps

Turn off the power at fuse or circuit box.

1. Rod Connections:


- Thread the fixture wire from the fixture through the lower rod, then secure the lower rod onto fixture using the threaded pipe.
- Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
- Thread the fixture wire through the upper rod and the hook, then secure the upper rod onto the middle rod using the threaded pipe, attach the hook onto the upper rod using the threaded pipe.

The height can be adjustable to 15"~57", by using the rods.

- Thread the fixture wire through canopy, then hook the rod assembly to the loop.
- Unscrew two ball nuts, remove mounting strap from canopy
- Attach the mounting strap to outlet box by using two mounting screws.
- Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire connector.
 Carefully put the wires back into the outlet box.


- Attach the canopy to the mounting strap by inserting the fixture mounting screws, and secure it with two ball nuts.
- Attach bulb(not included) to the socket. See relamping label at socket area or packaging for maximum allowed wattage.
- Attach the glass shade to the fixture, secure it with three set screws.

Turn on the power at fuse or circuit box.

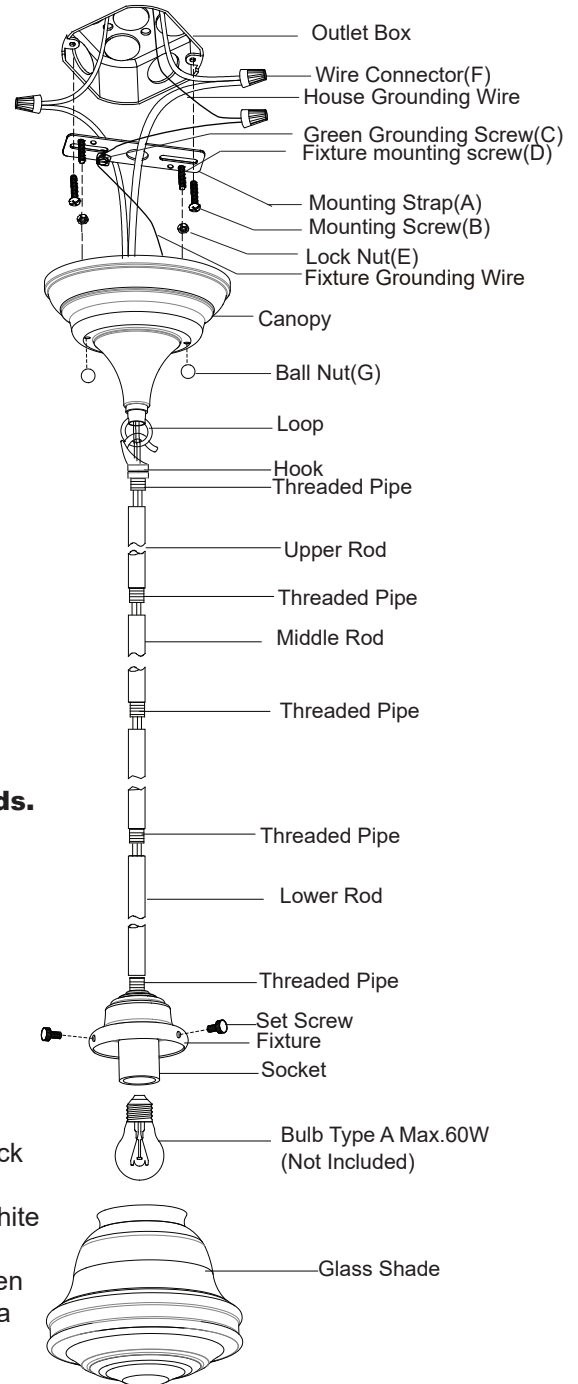

The following parts are available for re-order if damaged or missing.


Spare Parts List:

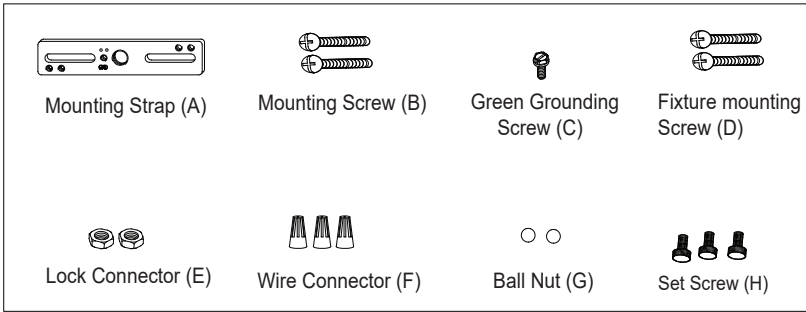

→ Assembly Kit
 6008MM (1 SET) for P0154 / P0267
 5773MM (1 SET) for P0153 / P0241



Glass Shade (1PCS)
 9681CS (1PC) for P0153 / P0267
 9680MI (1PC) for P0154 / P0241




12"Rod
 4644RR (3PCS) for P0154 / P0267
 3052RD (3PCS) for P0153 / P0241



6"Rod
 4645RR(1PC) for P0154 / P0267
 3051RD (1PC) for P0153 / P0241



3"Rod
 4646RR (1PC) for P0154 / P0267
 3050RD (1PC) for P0153 / P0241

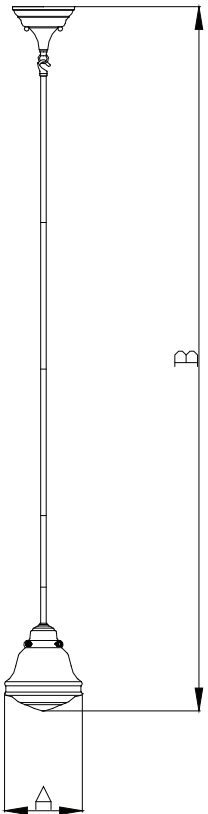

A: 6-1/4"

B: 15"~57"