

Frame Pendant

PD-29828 / PD-29858

dweLED
by WAC Lighting




Fixture Type:

Catalog Number:

Project:

Location:

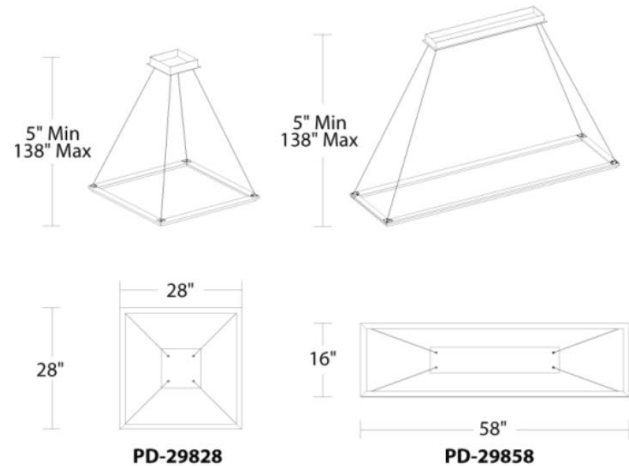

PRODUCT DESCRIPTION

An extruded acrylic diffuser with mitered edges gives this design a clean, elevated look, evenly spreading the powerful led light for a geometric illumination that matches back to the rectilinear canopy.

FEATURES

- Crisp mitered joints
- Thin color matched powered aircraft cables and hardware
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V-220V-227V) concealed within canopy

SPECIFICATIONS

Color Temp: 3000k

CRI: 90

Dimming: 100% - 10% ELV & 0-10V

Rated Life: 50,000 hrs


Input: 120-277V

Construction: Aluminum with acrylic diffuser

Finish: Brushed Black, Brushed Aluminum

Standards: ETL & cETL listed, Damp listed, Title 24

ORDER NUMBER

Model	Wattage	Voltage	LED Lumens	Delivered Lumens	Finish			
PD-29828	28"	55W	120V-277V	6334	5131	AL	Brushed Aluminum	
PD-29858	58"	58W		7160	5800	BK	Brushed Black	

Example: PD-29858-BK

dweLED.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760