


CRYSTORAMA




LIGHTING THE WAY FOR SIXTY YEARS

ASSEMBLY INSTRUCTION MODEL #DEL-90808-MK

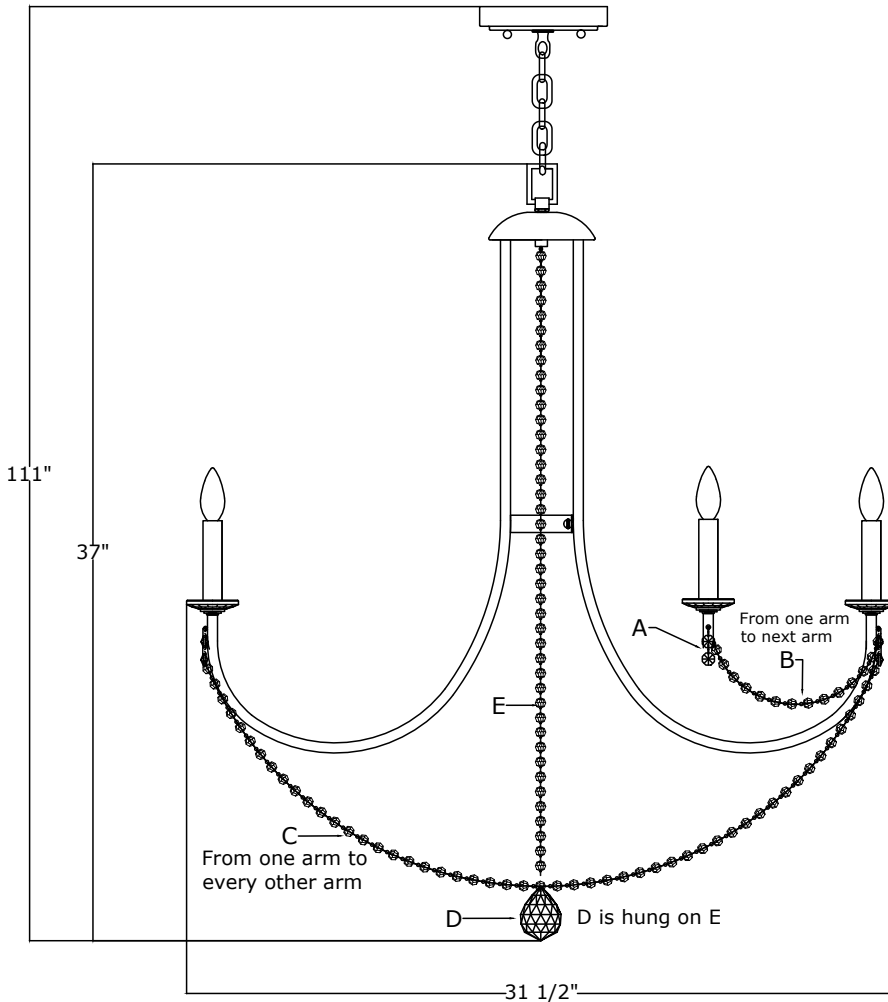

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 8- Candelabra Base Bulb
40 Watts recommended 60 Watts Max.

USE LED BULBS FOR EXTENDED USE
The fixture is Dry rated

HOW TO INSTALL:


Place the fixture parts on a soft cloth-covered platform before installation of fixture.

1. Install the mounting bar onto the outlet box.
2. Decide the desired hanging height and adjust the chain to the correct length.
3. Spread the arms out equally. Place the metal ring inside the arms and align the holes on it with the holes in the arms. Secure the metal ring with ball nuts. (please do not bend the arms out too hard when place the ring inside.)
4. Place the check ring on the top of fixture body and secure the fixture loop.
5. Raise the fixture up and do the wire connection. Attach the canopy over the mounting bar and secure with collar ring.
6. Dress the crystals as illustrated.

Dress Crystal Strands C in the following sequence:

- | | |
|-------|-------|
| 1 → 4 | 2 → 5 |
| 3 → 6 | 4 → 7 |
| 5 → 8 | 6 → 1 |
| 7 → 2 | 8 → 3 |

Spread the folded arms.

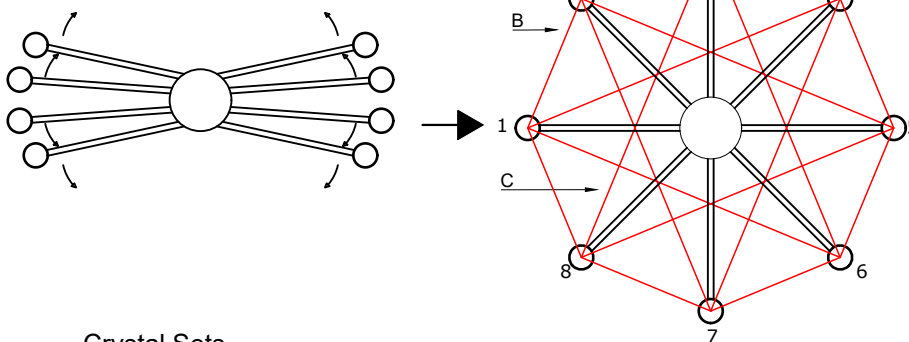

Crystal Sets

- A. 8 Sets. (2)14mm
- B. 8 Sets. 370mm long bead string--(10mm bead*24pcs)
- C. 8 Sets. 910mm long bead string--(10mm bead*59pcs)
- D. 1 Piece. (1)AS8-50mm Ball
- E. 1 Piece. 750mm long bead string--(10mm bead*58pcs)

⚠ WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.p65warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #DEL-90808-MK

Part Number

Part Numbers-For Hanging

- A. (1)-Mounting hardware
Wire Connector x 2.
Mounting bar x 1.
Lock washer x 1.
Hex nut x 1.
Mounting screw x 2.
Thread nipple x 1.
- B. (1)-Canopy (W5"xH1 1/4")
-XSN90803MKCAN5.11IN
- C. (1)-Collar Ring
- D. (1)-Collar Loop
- E. (1)-Chain (4mmx72")
-XSN90803MKCHA4MM
- F. (1)-Fixture Loop
- G. (1)-Check Ring
- H. (1)-Frame
- I. (1)-Distributor Box
- J. (1)-Center Finial
- K. (1)-Metal Ring ; $\text{\O}2$ 7/8" ; 5.5mm holes x 8.
- L. (8)-Ball Nut
- M. (8)-Crystal Bobeche ; $\text{\O}2$ 3/8", H3/8";
23mm center hole.
-XSN90802BOB2.4IN
- N. (8)-Candle Sleeve; \O 7/8", H4 1/8"
-XSN90806MKCDL4.13IN

