DISTRICT

Collection:Emett


Installation manual for:

LD6204BK D8"H10" L1

Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2. White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4. Secure mounting bracket to the junction box.
- 5.Insert screws (P4) in side of top unit the mounting bracket.
- 6.Put the canopy (P5) on the mounting bracket(P1) and use the Cap nut(P6) to screw tighten.
- 7.Place the glass shade (P13) on the lamp head and twist it with the outer ring of the lamp head.
- 8.Install E26 light source, no include bulb.

The end!

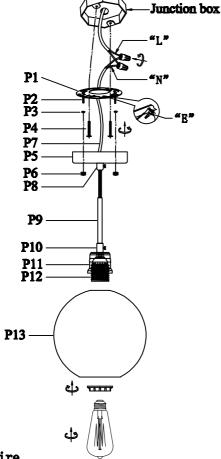

PARTS LIST

part	picture	Description	Qty	Check	list
P1	©	D4" Mounting bracket	1		
P2		5/32-32 Screw	2		
P3	()	Hex mut	2		
P4		5/32-32 Screw	2		
P5		D4.75" Canopy plat	1		
P6		Cap mut	2		
P7	<u> </u>	Two-core Power Cord 5.6° Black	1		
P8		Car iron parts	1		
P9		L4. 15"Tube	1		
P10		Coupling	1		
P11		D2.12" Socket cover	1		
P12		E26 Socket	1		
P13		D6" Glass shade	1		

"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire